



RESEARCH MEMORANDUM

STATISTICAL SURVEY OF ICING DATA MEASURED ON SCHEDULED

AIRLINE FLIGHTS OVER THE UNITED STATES AND CANADA

FROM NOVEMBER 1951 TO JUNE 1952

By Porter J. Perkins

Lewis Flight Propulsion Laboratory Cleveland, Ohio

> AFMOC TECHNICAL LIBRARY AFL 2811

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON

September 8, 1955

301

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

STATISTICAL SURVEY OF ICING DATA MEASURED ON SCHEDULED AIRLINE FLIGHTS

OVER THE UNITED STATES AND CANADA FROM NOVEMBER 1951 TO JUNE 1952

By Porter J. Perkins

SUMMARY

A statistical survey and a preliminary analysis are made of icing data collected from scheduled flights over the United States and Canada from November 1951 to June 1952 by airline aircraft equipped with NACA pressure-type icing-rate meters. This interim report presents information obtained from a continuing program sponsored by the NACA with the cooperation of the airlines.

An analysis of over 600 icing encounters logged by three airlines operating in the United States, one operating in Canada and one operating up the coast to Alaska, is presented. The icing conditions encountered provided relative frequencies of many icing-cloud variables, such as horizontal extent, vertical thickness, temperatures, icing rate, liquid-water content, and total ice accumulation.

Liquid-water contents were higher than data from earlier research flights in layer-type clouds but slightly lower than previous data from cumulus clouds. Broken-cloud conditions, indicated by intermittent icing, accounted for nearly one-half of all the icing encounters. About 90 percent of the encounters did not exceed a distance of 120 miles, and continuous icing did not exceed 50 miles for 90 percent of the unbroken conditions. Icing cloud thicknesses measured during climbs and descents were less than 4500 feet for 90 percent of the vertical cloud traverses.

INTRODUCTION

Meteorological data obtained from NACA icing research flights in supercooled clouds have provided information for the design of present ice-protection systems (ref. 1). These data were received from a relatively small number of flights within the United States. As a result of specialized flight planning involving selected weather conditions, flight paths, and cruising altitudes, the information provided may not have been representative of conditions encountered by aircraft on routine schedules

2

following conventional flight procedures. Additional knowledge of the icing problem including the extent, frequency, and severity of icing conditions experienced by scheduled airlines over world-wide air routes is required by aircraft designers and by aircraft operators in prescribing flight control procedures.

A program to obtain these more extensive icing-cloud data is being conducted by the NACA Lewis laboratory in cooperation with several major airlines and the United States Air Force. Several types of aircraft are equipped with NACA pressure-type icing-rate meters specifically developed for measuring icing encountered during scheduled operations. A preliminary report has been issued (ref. 2) which described the initial phase of this program over only one transcontinental air route in the United States from January through May, 1951. The program later was expanded to cover many domestic and overseas air routes and off-airway areas.

This interim report presents a preliminary analysis of data collected by three airlines (United, Eastern, and Northeast) operating in the United States from November 1951 to June 1952. Data for the same period have also been included from Trans-Canada Air Lines operating across southern Canada and from Pan American World Airways flying the Pacific Coast route to Alaska. A limited number of aircraft from each airline were equipped with the icing-rate meters which recorded continuous values of altitude, airspeed, and icing rate during icing conditions. Much of the data was limited to film records only. The cooperation of the airlines in obtaining these data is gratefully acknowledged.

A detailed study of the frequency of icing conditions with respect to total time over the various routes was not possible because the total flight times of the instrumented aircraft were unknown. An inspection of flight logs will be made later to find the flight time on airways and at various altitudes.

APPARATUS AND PROCEDURE

Icing-Rate Meter

The icing-rate meter installed on the airline aircraft was a pressure-actuating type developed by the NACA Lewis laboratory specifically for collecting statistical icing data. The meter (described in ref. 3) consists of three units, the ice-sensing probe, the film recorder, and the control unit (fig. 1).

The principle of operation of the meter is explained in figure 2, which shows an ice-sensing probe of 0.1-inch diameter containing small total-pressure holes mounted in the airstream and connected to a differential pressure switch. The total pressure from the probe is balanced against an ice-free total-pressure system (the conventional pitot pressure system in the aircraft). When the holes in the ice-sensing probe start to plug as ice builds up on the probe, the pressure in the probe side of the

30]

CA-1 back

pressure switch decreases. This is accomplished by allowing the air in the system to flow out through a small orifice connected to a static-pressure source. At a given value of differential pressure, the switch energizes an electric heater which de-ices the ice-plugged holes, thereby restoring the pressure balance. The time required to actuate the switch, or the heat-off period of this cyclic process, is inversely related to the rate of ice accumulation on the probe and is used as a measure of the icing rate. The calibration of the ice-sensing probe for rate of ice accretion in inches per hour is discussed in the appendix.

Recording of Data

Icing rate, indicated airspeed, and pressure altitude were recorded on photographic film contained in a replaceable drum. The film recorder started automatically at the beginning of each icing condition and shut off automatically 15 minutes after the end of icing for each encounter. The 15-minute record after icing had terminated provided approximately a minimum of 50-miles separation between icing periods when icing clouds were encountered more than once during the same flight.

A special data sheet requesting supplemental information from the flight crews was supplied by the NACA to correlate with the recorded data. The data sheet (shown in fig. 3) includes such items as time, date, location, and effects on aircraft performance.

A typical film record of icing encountered during a routine airline flight is shown in figure 4. Airspeed and altitude are recorded as continuous traces, and the icing-rate indications are shown as broken horizontal lines at the bottom of the film varying in length according to the duration of the heat-off period. The length of each broken line is converted to time and then to icing rate by using the icing-research-tunnel calibration discussed in the appendix. Correlation of the film data with the flight crew observations when available provided detailed information for each icing encounter.

Installation on Aircraft

The icing-rate meters were installed on five different types of aircraft (DC-3, DC-4, Convair 240, Constellation, and North Star). A typical installation of the ice-sensing probe mounted on a DC-4 is shown in figure 5. The installations were usually on or near the top of the fuselage and as far forward as possible. Flight tests on each type aircraft were made to determine whether the air-flow characteristics and total pressure at the probe locations were the same as those measured by the conventional pitot tube.

The film recorder was mounted in the aircraft at a convenient location for replacing the film drums. The airspeed and altitude capsules in the recorder were connected to the conventional total—and static—pressure systems in the aircraft. The indicating lights on the control unit, or in some cases on a separate panel in the cockpit, alerted the flight crew to record the information on the supplemental data sheet when the film recorder operated in an icing condition. An indication of the rate of icing on the ice-sensing probe was supplied to the crew by a flashing light paralleled with the cyclic de-icing system of the probe.

ANALYSIS OF DATA

An icing encounter was defined as a period of continuous or intermittent icing where periods of nonicing did not exceed 15 minutes. Periods within an icing encounter during which ice accumulation was continuous, as indicated by at least one operating cycle of the meter during a l-minute period, are defined in this analysis as icing incidents. Separating periods of continuous icing from periods of nonicing gave a limited estimate of the discontinuous nature of the icing clouds.

Individual icing encounters were separated on the film by simultaneous breaks in all the continuous traces. Each encounter was then associated with the corresponding entries on the data sheet. The encounter was marked off on the film in 1-minute intervals, and the icing-rate, altitude, and airspeed traces were each averaged and computed as one value for each 1-minute period. The pressure altitude was measured to an accuracy of ±100 feet using NACA standard atmosphere. Since the indicated airspeed fluctuated considerably, particularly in areas of turbulence, the average values were calculated within about ±3 miles per hour.

The simultaneous measurements of altitude and rate of icing on the film made possible an analysis of the vertical extent or thickness of icing-cloud layers encountered during climbing and descending. These cloud-thickness measurements may not in some cases be fully correct because of the impossibility of determining from the records whether the aircraft traversed the full extent of the layer. The aircraft may have entered or emerged from the cloud at some point between the top and bottom. Also, errors may be caused in some cases by long horizontal distances resulting from slow rates of climb or descent. Also, in many cases the vertical extent of multiple layers may not have been completely surveyed because cruising altitudes are often assigned between cloud layers.

The measurements of icing rate and airspeed were used to calculate values of liquid-water content of the icing clouds. In this report liquid-water content w in grams per cubic meter was computed from the relation

$w = 15.8 (R/V)(\rho/E)$

where

- R icing rate, in./hr
- V true airspeed, mph
- ρ density of ice
- E collection efficiency of sensing probe

Both the density of ice $\,\rho\,$ on the probe and the droplet collection efficiency E of the probe were assumed constant with $\,\rho/E\,$ as unity for all conditions. Some simultaneous measurements of liquid-water content using the icing-rate meter and rotating multicylinders have been made during icing research flights. This limited comparison showed that the meter measurements are generally higher than those from the cylinders, particularly in conditions where liquid-water content fluctuated considerably and produced high peak values. The two methods agreed within 10 percent in icing conditions that produced a steady rate of icing with water contents under 0.5 g/cu m. Collection efficiency variations resulting from changes in droplet size and limited accuracy of the icing-rate measurements probably contribute to the limited agreement of the two measuring methods.

Droplet-size data were not obtained in this program because of measurement difficulties, thereby preventing a complete evaluation of the severity of the icing encounters. The probable severity of the icing conditions can be estimated, however, by relating the extent of the icing encounters, the liquid-water content, and the temperature data which are measured in this survey to previous icing measurements which included droplet sizes. The frequency distribution of droplet sizes have been obtained by instrumented research flights by the NACA and other agencies and are reported in reference 4.

RESULTS AND DISCUSSION

The approximately 600 icing encounters analyzed in this report were logged during the period from November 1951 through June 1952. These encounters gave almost 10 times the amount of data reported in the preliminary survey of reference 2 because of the greater amount of flying time accumulated during the latter period. The data are assembled and summarized in tables I and II. Table I contains all icing-rate meter measurements which could be associated with the corresponding flight crew observations. Table II contains all icing-rate meter measurements which could not be associated with flight crew observations either because of

7T0

questionable correlation of the individual icing encounters or the absence of any flight observations when the meters were operating. Flight crew observations which could not be correlated with any icing-rate meter records were included in analyses of the frequency of occurrence of icing with respect to altitudes and icing-cloud temperatures.

Because of the manner in which the data were collected, the icing data presented herein should not be used to evaluate the full range of meteorological variables that may be associated with icing clouds. The airline aircraft collecting the data followed conventional flight procedures established to reduce the potential hazard of icing encounters. Known icing conditions were probably avoided wherever possible. If icing was encountered which was considered hazardous or in any way hampered the conduct of the flight, airway clearances were obtained, if possible, to climb or descend out of the icing condition. As a result, such conditions would not be fully surveyed since the maximum horizontal extent would not be known and possibly the maximum severity would not be encountered. In some cases, however, severe conditions cannot be avoided because of traffic restrictions or altitude limitations. The occurrence of such circumstances is undoubtedly very infrequent; therefore, the full extent and severity that may exist in icing conditions will probably not be measured during scheduled airline operations until a large amount of data is assembled. The amount of information presented herein is probably sufficient to give representative icing values for airline operation over many of the areas covered.

The number and types of instrumented aircraft with the corresponding number of icing encounters over the various air routes are listed in the following table. Although five types of airline aircraft were instrumented, most of the meters were installed on types which limited a predominant part of the data to relatively low altitudes.

Airline	Number of aircraft with meters installed	Type of aircraft	Routes covered	Number of icing encounters
United	6	DC-4	Transcontinental and Pacific Coast U.S.	319
Eastern	1	Constellation 749	Eastern U.S.	83
Northeast	2	DC-3 and Convair 240	Northeast_U.S.	58
Trans-Canada	1	North Star (DC-4)	Transcontinental (Southern Canada)	79
Pan American	1	DC-4	Pacific Coast between U.S. and Alaska	83
Totals	11	5 types	6 arēas	622

Air routes covered by survey. - All the icing data were collected along the air routes flown by the five airlines as outlined in figure 6. The United States was covered by a transcontinental air route from New York to San Francisco, by East Coast routes from Miami to northern Maine, and by a West Coast route from Los Angeles to Seattle. A limited amount of data was obtained from a transcontinental route across southern Canada and from a Pacific Coast route to Alaska from Seattle. The air route across the United States, which was also surveyed the previous season (ref. 2), supplied data from the Great Lakes area and over the Central Rocky Mountains.

The frequency of occurrence of icing with respect to particular areas or routes could not be determined at the time of this analysis because the amount of total flying time with meter-equipped aircraft over any particular area or route, for the period of the survey, was not known. Since the instrumented aircraft were not generally confined to any one route, the data received from a particular aircraft did not represent the frequency of icing for a given route.

Horizontal Extent of Icing Clouds

Prolonged periods in icing conditions even at low rates of accumulation can produce adverse effects on aircraft performance. Certain unprotected aircraft components which can tolerate small accumulations of ice are hampered by large accretions resulting from extensive icing periods. Hence, the horizontal extent of an icing encounter is of particular significance in evaluating icing conditions. The extent of icing during airline operations is usually measured during straight-line flight, although some encounters may be prolonged because of holding or following some other traffic-control procedure within an icing area. The distance between scheduled stops influences the extent of icing measured by some airlines, particularly those with short routes.

A study of the film records showed that almost one-half the prolonged icing encounters contain intermittent periods during which ice does not form indicating broken icing-cloud formations. Conditions of continuous ice accretion over appreciable distances were rather infrequent and usually were associated with severe icing conditions. In cases of prolonged nonicing periods, more than one icing encounter was logged during the flight since, as discussed previously, the meter stopped after a period of nonicing exceeding 15 minutes.

The horizontal extent of icing encounters is tabulated in tables I and II. A cumulative frequency curve plotted from these values (fig. 7) shows that about 10 percent of the encounters extended 120 miles or more and that the greatest distance in an icing encounter was 430 miles. Over 400 separate encounters from all the air routes surveyed during the season

are included in this plot. The data include the encounters recorded during climb and descent as well as at cruising altitudes and, therefore, define the extent of icing encounters as experienced during routine airline operating procedures.

The number of icing incidents (periods of continuous ice accretion) within any encounter is tabulated in tables I and II. Over one-half the encounters were single icing incidents (continuous during entire encounter). Only a very small percentage of the encounters contained four or more icing incidents as shown on the graph in figure 8. The maximum number of icing incidents per encounter was obtained from the Pacific Coast route to Alaska where 10 incidents were recorded over a distance of 147 miles in one case and over a distance of 213 miles in another.

The longest icing incident within each encounter is also tabulated in tables I and II. The maximum extent of continuous icing measured was 124 miles, whereas 90 percent of the longest incidents within each encounter were less than 50 miles. These data are plotted as a cumulative frequency curve in figure 9.

The existence of nonicing periods within an encounter shows that continuous icing protection may not be needed during an entire encounter. In many cases, the extent of icing in discontinuous clouds is less than one-half the total extent of the encounter. The lengths of each individual icing incident within each encounter were added together and tabulated as total horizontal distance in icing for each encounter (tables I and II). These data, plotted as a cumulative frequency curve in figure 10, show that 90 percent of the combined icing incidents extended less than 70 miles whereas 90 percent of the full encounters (including nonicing periods) extended less than 120 miles (fig. 7).

Vertical Extent of Icing Clouds

About 40 percent of the encounters were recorded during either climb or descent, thus providing a substantial quantity of data for evaluation of the thickness of icing cloud layers. Possible errors in the interpretation of these data were discussed in the ANALAYSIS OF DATA section. Depending on the operation of the meter, the data were grouped for single or multiple cloud layers. A multiple-layer cloud system was interpreted from the film record when a period of nonicing existed for at least 1 minute while the aircraft was changing altitude. This method does not establish the actual existence of multiple layers but rather separates intermittent conditions from continuous periods of ice accretion during climb or descent.

The vertical extent of icing clouds obtained from these data is plotted in figure 11. The maximum multiple-cloud thickness measured was

10,800 feet compared with only 4000 feet measured during the early part of the statistical program (ref. 2). The 10,800-foot descent (12,800 to 2000 feet over the East Coast U. S.) appeared to be composed of three layers of icing clouds in which icing was measured during 44 percent of the descent. The maximum thickness of single layers measured 5500 feet. The cloud thicknesses for all single and multiple layers flown through did not exceed 4500 feet for 90 percent of the climbs and descents. It is of interest to note that about two-thirds of the data providing cloud thickness measurements were obtained during descent and only about one-third during climb. This indicates that, operationally, icing can be more readily avoided during climb, probably because preflight briefing permits a choice of flight path which would in many cases avoid flight through a cloud layer.

Altitude Range of Survey

U.H.74

The airline aircraft collecting the icing data operated over a range of altitude, determined by the type of aircraft, the distance between stops, and the type of terrain over which the flights were conducted. The amount of flight time at various altitudes could not be obtained for the present data and, therefore, the frequency of occurrence of icing with respect to altitude could not be determined. Icing was encountered at altitudes ranging from 1500 to 22,000 feet, whereas the most frequent cruising altitude was 10,000 feet. Because of the small amount of time at higher altitudes, only 5 percent of the icing was encountered at altitudes over 15,000 feet. United Air Lines' flights across the United States and along the West Coast encountered icing predominantly between 5000 and 8000 feet and also between 11,000 and 14,000 feet. Most of Eastern Air Lines' icing data were obtained above 12,000 feet, whereas Northeast Airlines' icing encounters were all obtained below 8000 feet. The Pacific Coast route to Alaska provided icing data at altitudes between 8000 and 13,000 feet.

Temperature of Icing Clouds

The temperature of icing clouds is a prime factor in establishing the amount of heat required for ice prevention or removal in thermal protection systems. The temperature data from this survey are included to add to the published research information (ref. 1) on temperatures of icing clouds. In evaluating the data it should be realized that the conventional aircraft temperature indicator from which the present data were obtained has limited accuracy, particularly in icing clouds. The accuracy of the temperature observation was indicated by the fact that when the frequency of the temperature values was tabulated in 1°C increments the readings peaked at values of 0°, -5°, -10°, and -15° C. The scale of the temperature indicator on most aircraft can be read conveniently only to the nearest 5° C increment, and the values between are approximations.

In calculating the true cloud temperatures from the indicated values, a correction for the kinetic temperature rise in saturated air as a function of airspeed and altitude was applied. A recovery factor of 85 percent for the probe was used based on a flight calibration in dry air of an airline temperature installation. A cumulative frequency curve of the corrected data (table I and other flight crew observations) plotted in figure 12 shows that 90 percent of the temperature observations were above -15° C (+5° F) and that the lowest temperature measured in icing clouds was -27° C (-17° F), which is about equivalent to the lowest temperature previously reported (ref. 1). Figure 12 includes 380 temperature observations from all the air routes. Temperatures obtained across southern Canada and from the Pacific Coast route to Alaska were generally lower than those from the more southern latitudes within the same altitude range.

Icing cloud temperatures as a function of pressure altitude are shown in figure 13. In this plot, the average temperatures were computed for each 1000-foot increment of altitude. The wide spread of temperatures for the altitude range covered by the present data is outlined by the shaded area on the figure. For data obtained during climbing and descending, the temperature readings were assumed to be taken at the altitude where icing was first encountered. A rather consistent drop in the average temperatures with increasing altitude is noted, although there was considerable scatter because of the few observations available at altitudes greater than 15,000 feet. Temperatures from previous research data (ref. 1) also plotted in figure 13 show rather good agreement with the present data below 12,000 feet, but are over 60 C lower at altitudes greater than 12,000 feet. The large differences, particularly at higher altitudes, may be attributed to climatic conditions. Most of the data at altitudes above 12,000 feet were obtained from southeastern United States. whereas a large part below 8000 feet were obtained from northeastern United States. Most of the temperatures from the middle altitudes were measured over the central route across the United States.

Icing-Rate Measurements

The intensity of the icing encounters is defined in this report as the rate of ice accumulation on the icing-rate meter probe. The icing rate was also used to calculate the approximate liquid-water content of the icing clouds. Not all the icing-rate values indicated by the meters can be considered reliable, however, because incomplete freezing or run-off effects were experienced by the probe at cloud temperatures above—ll C. Unfortunately, about 60 percent of the icing-rate data were without corresponding temperature observations and therefore could not be evaluated as being within or outside the reliable range of operation of the probe.

The icing-rate data with associated temperature observations were used to determine the intensity of the encounters. The range of icing rates considered reliable is shown in figure 14 as a function of cloud temperature (discussed in the appendix). This curve shows, for example, that at -6° C (21° F) icing rates up to 5 inches per hour are within the calibration accuracy, but beyond this rate run-off occurs and the data become unreliable. To determine the frequency of occurrence of reliable icing rates as well as those beyond the range of the meter, the data were plotted on a cumulative frequency basis with respect to total time in icing conditions. As explained in the section ANALYSIS OF DATA, the average icing rate was computed for each 1-minute period. This gave approximately 1400 minutes of icing-rate measurements with known cloud temperatures. Figure 15 is a plot of these data grouped according to temperature intervals and considered on a cumulative basis using icing rates equal to or exceeding 1 inch per hour. The temperature grouping allows extrapolations of the icing-rate data beyond the reliable limits. The extrapolations are based on the slope of the curve for the low temperatures which is well defined within the reliable limits. These data can be represented by a straight line on semilog paper. The solid lines extend to the limits of reliable measurements, whereas the dashed lines are extrapolations beyond these limits. Figure 15 indicates that the frequency of given icing rates increases with temperature. This greater frequency results from the greater amount of flying time in icing at the higher temperatures (80 percent of the encounters were above -llo C, fig. 12). The fact that all the lines have the same slope would indicate that there is no dependence of icing rate on cloud temperatures; this may not be quite true for all icing conditions.

Liquid-Water-Content Calculations

Average values of liquid-water content for each 1-minute increment of icing were computed from the corresponding icing-rate values. The results were considered reliable or unreliable as established by the icing-rate data and are plotted in figure 16 for the same temperature intervals as used for icing rates. The solid lines are within the reliable range and the dashed lines represent extrapolations beyond the runoff limits. The greater frequency of higher water contents associated with high temperatures is also evident in this figure. In the temperature interval from -2° to -4° C, about 10 percent of all the data exceeded 0.5 gram per cubic meter; less than 6 percent of all the data exceeded this value at temperatures below -10° C. An extrapolation of the data in the temperature interval from -2° to -4° C shows that 1.0 gram per cubic meter or greater exists for only 2 minutes of every 100 minutes in icing.

A frequency distribution of liquid-water content for all temperatures can be obtained by totaling the reliable and extrapolated frequencies of figure 16. The data in the temperature intervals of figure 16

are combined into the solid line shown in figure 17. Only liquid-water contents greater than 0.1 gram per cubic meter were considered. This figure shows, for example, that the liquid-water content is greater than 1.0 gram per cubic meter for 7 minutes out of every 100 minutes in icing conditions. The total data obtained from the meters including those in the unreliable range are also plotted on this figure. These data indicate that the meters gave somewhat higher values in the unreliable range at liquid-water contents up to about 0.9 gram per cubic meter and then dropped off rapidly as the intercepted water ran off the ice-sensing probe. This comparison indicates that all the measurements (reliable and unreliable) treated as a group are within +15 percent of the probable values up to 1.0 gram per cubic meter.

The water contents measured during airline operation were slightly lower than previously published data from rotating multicylinders taken in cumulus clouds but are considerably higher than similar measurements taken in layer-type clouds (refs. 5 to 8). These comparisons are also plotted on figure 17. Whereas I percent of the liquid-water contents of the present data probably exceeded 1.6 grams per cubic meter, the same amount from the earlier data exceeded only 0.7 gram per cubic meter in layer-type clouds. A distinction between cloud types was not possible from the airline observations, although it would be reasonable to assume that most of the records came from layer-type clouds, considering operational procedures, time of the year, and the areas over which the data were taken. The duration of the encounters would further indicate a predominance of data from layer-type clouds. The difference of measuring methods used to obtain these data and those previously published may be responsible for the differences in the data results. The icing-rate meter data are continuous for an entire icing condition and give an average for 1-minute intervals, whereas the multicylinder method only sampled the clouds at certain times and gave an average value over intervals of from 3 to 5 minutes. Also, as pointed out in the previous section ANALYSIS OF DATA the meter indicated higher liquid-water contents than those simultaneously measured with multicylinders in nonuniform icing clouds.

The relation of average liquid-water content to the horizontal extent of icing clouds in an encounter (neglecting nonicing periods) was studied using all the data regardless of the reliability of the measurements. For average liquid-water contents up to 0.7 gram per cubic meter, no particular variation with the extent of icing clouds was evident within distances of about 80 miles. At distances greater than 80 miles, however, average liquid-water content decreased with increasing extent and only 0.3 gram per cubic meter or less existed in distances exceeding 160 miles. The greatest extent of icing clouds measuring above 0.7 gram per cubic meter was 90 miles, and 90 percent of these higher liquid-water contents were in icing clouds extending less than 50 miles.

The icing-rate records indicated considerable variation of liquid-water content accompanying many of the intermittent icing conditions. Average values of icing rate for complete encounters, excluding periods of nonicing which exceeded 1 minute, are tabulated in tables I and II. The average liquid-water content was determined for the longest continuous incident selected from the intermittent conditions in each encounter. These values, also tabulated in tables I and II, are in some cases about 0.2 gram per cubic meter higher than the average for the entire encounter.

Total Ice Accumulation

Liquid-water content and extent of the icing clouds determines the total thickness of ice collected on aircraft components excluding collection-efficiency effects. The total ice thickness is defined as the thickness calculated to accumulate on the sensing probe if it was not de-iced periodically. This can be considered as the largest thickness that any component collects because of the high collection efficiency of the probe. This value is considered to partially measure the severity of an icing condition and is used as a basis for comparison of the statistical data.

An ice thickness that would hypothetically collect on the sensing probe was obtained by totaling the 1-minute periods of icing rate (in./min) measured by the probe during each encounter: The ice thickness was computed for each encounter and is tabulated in tables I and II. A cumulative frequency curve of these values using all the data collected from the meters is plotted in figure 18. This plot shows that about 93 percent of the data are from icing encounters where 2 inches or less of ice would have accumulated on the probe. Conditions yielding up to this amount of ice were called "trace to light icing" by the flight crews, depending upon the cloud temperature and the type of aircraft. Cloud temperature can influence the type of ice formation with equivalent total accretions, creating more adverse conditions (mushroom-type ice) at higher temperatures. Hypothetical ice accumulations greater than 2 inches (7 percent of the encounters) were generally called "moderate icing" by the flight crews. Moderate icing caused losses of airspeed up to 25 miles per hour or required an increase in engine power. The maximum accretion calculated was 6 inches of ice, which was collected over a distance of 151 miles in one case and 158 miles in another case.

A close agreement is shown in figure 18 between the limited quantity of preliminary data obtained during 1950 and 1951 (ref. 2) and the more extensive data collected during 1951 and 1952. The information of this report is almost 10 times the volume of the earlier data. The similarity of data from the two seasons may be explained by the fact that 55 percent of the data of this report were obtained from similar transcontinental DC-4 operations from which all the previous data were obtained.

SUMMARY OF RESULTS

This report summarizes the statistical icing data collected from scheduled airline flights over United States and Canadian air routes from November 1951 to June 1952. The following significant information was provided:

- (1) Almost one-half of over 600 separate icing encounters logged by the airline aircraft were intermittent icing conditions where several nonicing periods during an encounter indicated broken-cloud conditions.
- (2) About 10 percent of the encounters exceeded 120 miles in horizontal extent, with one encounter reaching a distance of 430 miles. Distances in which icing was continuous, however, did not exceed 124 miles, and 90 percent of these unbroken conditions extended less than 50 miles. These measurements were influenced by the distance between scheduled stops and by other flight procedures which varied among the airlines collecting data.
- (3) The vertical extent of icing-cloud layers measured during routine climbs and descents gave maximum cloud thicknesses of 10,800 feet for multiple layers and 5500 feet for single layers. About 90 percent of all the vertical cloud traverses were less than 4500 feet.
- (4) Almost 90 percent of the temperatures observed in icing were above -15° C (+5° F), and the lowest temperature observed was -27° C (-17° F).
- (5) Liquid-water contents computed from icing-rate measurements exceeded 1.0 gram per cubic meter for 7 minutes out of every 100 minutes in icing conditions. The total frequency distribution of water contents at all temperatures was obtained by extrapolation of the data into the unreliable range of the icing-rate meter. These data are lower than previously published information obtained in cumulus clouds but considerably higher than earlier data taken in layer-type clouds. For horizontal distances exceeding 160 miles, liquid-water contents averaged 0.3 gram per cubic meter or less.
- (6) Total ice accumulation, defined as the thickness of the ice calculated to collect on the ice-sensing probe if continuous icing was permitted, was computed to be 2 inches or less for 93 percent of the encounters. The maximum accumulation was 6 inches of ice calculated for two encounters extending about 150 miles.

Lewis Flight Propulsion Laboratory
National Advisory Committee for Aeronautics
Cleveland, Ohio, July 6, 1955

3017

APPENDIX - CALIBRATION OF ICE-SENSING PROBE

The rate of icing indicated by the ice-sensing probe can be expressed by the relation \cdot

$$R = \left(\frac{T}{P}\right) \times 60$$

where

R icing rate, in./hr

T ice thickness, in.

P icing period, or heat-off time, required to accumulate ice to thickness T, min

The icing period was determined by the ice thickness required to plug the total-pressure holes (0.016-in. diam) in the ice-sensing element (0.1-in. diam) to the point where the differential-pressure switch would be actuated (differential pressure equal to 8 in. of water). The ice accretions on the probe were viewed through an optical enlarging system in the Icing Research Tunnel of NACA Lewis laboratory. These observations showed that the required ice thickness (normally about 0.020 in. on the leading edge) varied with air velocity, air temperature, and rate of icing on the probe. The possible effects of droplet size and altitude were not investigated.

A calibration was made using the magnifying system to measure the ice thickness and a stop watch to measure the icing period. An accuracy within ±10 percent of the indicated icing rate resulted from the limited accuracy of these measurements at the higher icing rates. Since the icing period increases with decreasing icing rate, better accuracy was possible at the lower rates. An icing rate of 12 inches per hour (icing period of about 0.1 min) was considered the readable limit of the instrument, and values exceeding this amount are noted in the data tables as 12+ inches per hour.

Further studies were made in the Icing Research Tunnel to determine the effect of the heat of fusion on the ice accumulating on the probe. Some of the supercooled water impinging on the probe could be seen running back and failing to freeze to the ice surface when the surface temperature was apparently elevated to near the freezing point by the heat released as the impinging water froze on the surface. The conditions for incomplete freezing (run-off) depend upon the ambient air temperature, rate of impingement, air velocity, and altitude. The limits of air temperature and icing rate beyond which run-off occurred were determined visually and are shown in figure 14. Although the icesensing probe continues to operate above these limits, the indications

are erratic and cannot be considered reliable. Since air velocity and altitude had little effect over the range covered, the run-off limit is shown in figure 14 as a function of only icing rate and air temperature. In the range of conditions in which run-off occurs, the data obtained are useful in defining the horizontal and vertical extent of icing clouds, the frequency of occurrence of icing, and an approximation of the icing severity.

REFERENCES :::

- 1. Hacker, Paul T., and Dorsch, Robert G.: A Summary of Meteorological Conditions Associated with Aircraft Icing and a Proposed Method of Selecting Design Criterions for Ice-Protection Equipment. NACA TN 2569, 1951.
- 2. Perkins, Porter J.: Preliminary Survey of Icing Conditions Measured During Routine Transcontinental Airline Operation. NACA RM E52JO6, 1952.
- 3. Perkins, Porter J., McCullough, Stuart, and Lewis, Ralph D.: A Simplified Instrument for Recording and Indicating Frequency and Intensity of Icing Conditions Encountered in Flight. NACA RM E51E16, 1951.
- 4. Lewis, William, and Bergrun, Norman R.: A Probability Analysis of the Meteorological Factors Conducive to Aircraft Icing in the United States. NACA TN 2738, 1952.
- 5. Lewis, William, Kline, Dwight B., and Steinmetz, Charles P.: A
 Further Investigation of the Meteorological Conditions Conducive
 to Aircraft Icing. NACA TN 1424, 1947.
- 6. Kline, Dwight B.: Investigation of Meteorological Conditions Associated with Aircraft Icing in Layer-Type Clouds for 1947-48 Winter. NACA TN 1793, 1949.
- 7. Lewis, William, and Hoecker, Walter H., Jr.: Observations of Icing Conditions Encountered in Flight During 1948, NACA TN 1904, 1949.
- 8. Kline, Dwight B., and Walker, Joseph A.: Meteorological Analysis of Icing Conditions Encountered in Low-Altitude Stratiform Clouds.

 NACA TN 2306, 1951.

-

TABLE I. - MEASUREMENTS AND CORRELATED OBSERVATIONS OF ICING CONDITIONS ENCOUNTERED DURING ROUTINE AIRLINE OPERATIONS FROM

NOVEMBER 1951 TEROUGH JUNE 1952

(a) Transcontinental and Pacific Coast (U.S.) routes

altimote, a	Fori- routal extent of ca-	Rusber of ising imal-	Total howl- sontal icing,	Average leing rate for all	Average Liquid- water contrat	1018	sum ecnt s incide in encou	nt.	Calcu- lated total	Aver- age tree	Cor- rected mir	Date	Plan (local)	Location of encounter	Flight observations and some
	ter,	dents for m- cam- tay	1	icing inci- dents, in./hr	fer all ising incl- dents, g/es n	ising rate, in.	iverage liquid- water ecn- tent, g/es m	Born- zortel dz- test, si	accent lation, in.	apeed:	atage,			,	
4,100 5,000 6,100 3,600/2,700 5,006/3,000	7 46 8 20 88	12114	* # 7 8 8	1.2 4.3 3.8 1.7 3,4	9.1 .3 .3 .2 .2	1.2 8.7 3.8 1.7 3.8	0.1	7 34 5 20 52	0.1 1.0 .2 .3 .8	206 226 236 230 154 212	-5 -5 -4 -7 -7		0616 PAT 0536 POT 0436 PAT 0455 PAT 1536 PAT	Sales, Oreg. to Williams, Unior Sales, Greg. to Williams, Calif Sales, Greg. to Williams, Calif Sales, Greg. to Williams, Calif Sales, Greg. to Williams, Calif Calif.	Duty rims ice - light intensit clear rime ice - light intensit Clear rime ice - light intensit Clear rime ice - light intensit Chantaional rime in tops of com-
10,500	10	1	10	2.9	-8	8.9	.2	10	ء.	508	-2	1/1/10	1930 PST	Seinrest Gottlage Grove, Greg. sa. Frail, Greg.	Cornelional rough rise and smov about 2,75 in. on skick
12,900	64	•	86	2,6	.9	2,2	و.	28	•	296	-1	1/3/32	1205 PST	Betreen Cottage Grees, Oreg. Ac-	Occasional rough rise and most
11,100 6,500. 7,500/8,500	81 4 55	1 1	2) 58	3.8 3.8		11.8 11.8	.5 .5	#1 60	1.3	947 180 211	1	12/2	1706 PST 0838 PST 1799 CST	Over Cottage Grove, Grag. Near Red River, Dails. South Send, End, to Geehen, Ind.	Frace of sixed ice frace of ice Light be sederate rough ice
11,200	76	. 1	75	8.8	.4	6,6	,4	70	2,1	241	-5	1/6/82		Reconville, Pa. to Selinsprove,	Light rough los
,400/a,400	*	2	-	7.7	.4	9,1	,7	41	3,4	206	-3	1/0/02		Filtre-Barre, Fa. to Selinagrows	
8,200 7,100 12,100	147 58 92	2 2	120 55 81	8.5 6.1 6.7	.6 .1 .5	18+ 4.0 7.1	.94 .23 .15	74 53 65	5.3 1.5 2.4	\$22 21.0 \$10	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1/0/50	0348 857	Pa. Phillipsburg, Pa. to Hereur, Pa. Over Des Holmes, Ious Evanston; Wys. to Elic, Bev.	Light to moderate rough mirture Light rise ice
6,500 7,400	53 84	. :	왍	8.4		4.9)\$	19 18	1.2	220 210	-9 -7	3/7/32			Trace of ice
7,000 7,200 7,400	11 10	1 5 1	11 37	1,8 2.2 8.1	,1 ,0 ,1	1.8 3.7 8.1	.1 .5	11 11	.1 .4 1.3	299 299 291	-5 -8 -3	\$/14/88 \$/14/88 \$/14/88	0137 CST 0137 CST	Sundwaky, Okio to Yelesio, Okio Bayes Canter, Bebr. be Lexington, Schr. Korth of Kenrosy, Bebr. Sure Grand Island, Bebr. Over Boline, Ill.	high rough rise mix in top of overcast Yesy little ice Trace of ice Ficked up about 1/2 in, rise is
,000/14,700				4.0	ء	اما		200		191	-8				le min
18,900	14	: []	· ;; }	4.5	.,	4.5		u u		214	7	1/24/52 1/24/52		Supremento, Calif. to Reso, Mer. Fort Bridger, Nyo, to Simolair,	Fight flight. Bard to tell when
14,100	185		141	7.8	.5	8.6	.6	102	4.0	an .		1/24/50	2500 107	Fort Builders, then to Simulate	Highs flight, Herd to bell whe In leing Hight flight. Herd to bell she
5,300	67	e l	₽5	2,3		2.9	ا در	2.0	. تر	220	5	1/85/N2	1905 to	MyD. Probbold Oblo to Malada Obla	in tering
12,800	104	. •	97	7.8	.6	6.1	, ,a	83	3,2	230	-10	1/26/58	1051 EST 0344 to	Fort Beidger Wyo, to Sattle Kountain, New.	1/4 In. rime ice with ion orysh
10,000)(O	£ :	а, [7.6	.5	8,2	14	80	2.8	***	-6	1/21/52			Light ice
,800/11,000 5,500 300/8,600 18,400	38 51 48 55	2 2	9438	5.9 3.0 4.0 5.6	.5 .5 .5	5.9 2.8 5.4 5.6	.3	36 25 25 35	1.0	\$200 1992 2018 2017	-7 -5	/11/se	0510 PST 1045 PST 8250 PST 1850 PST	Part Jones, Calif. so Ending, Calif. Children Housteins, Crug. Swettle, Wash. to Fortland, Crug Tolodo, Nash. Williams, Calif. to Danner Sounis, Calif.	Light rime - 1/2 in. on ice still Tract of rime frame to light loing light to moderate clear ice
ا مدر 1007ء	155	4.	 	-0.51	أحدا		ا ـمار		ta (8) :	 			-001819	Sounds, Callf.	اور بالإدارية المارية المارية المارية المارية
30-000 300/1/300	100	E №. 1	, 65. I	14-6 8-0		73	. ,5	1.74				/2/2	IN PER	Promounty, Trink, What Damp Roberts J Calif. to San- Francisco, Calif. Chicago, Ell. to Loss City, Loss	Trace of clear les fages glass - shown 1/2 is. or stick
17.600		1	7	4.4	.5	4.4	.3	- 60	1.5 ,e	299 : 347	. و. مد				on Appea
9,900	BS	î	85	1.2	7			- 1	1.5	220		1/80/82 2/8/03	LIOO KET	Ragle, Colo. to Las Vegas, Nev. Grand Island, Nebr.	Uncertain duration - slight tree of ice hight rine - lest 25 ma indical
500/3,600		ىلى		احند						-				•	alrepeat
000/2,100	43		10	*7		7.7	T, T	12		185	: 1	2/2/52 2/2/52		Fried Hillion, Natur, W. Camba, Natur Claveland, Onio	frace of lee in stratecomming to
6,200	· 35	2.	25	ابده	.5	أيم	5	•		200					Trees of ise descending through overseast
	3				H				鏬	3	130			haliogagrape De. M. Grey III. do Mana Glayd Iban Both Platter, Refer. tol Compe, Refer.	Trust of alaborate lating
000/5,300 7,500	Ħ	1	33 41	2.4 3.8	.2	:::	- ₹	38 26	:	196 907	-12	/3/3	SE SE	bayore, 711. Dagte Marie, Calif.	Trues to light loing in Trues of laing
8,500 8,500	26	3	10	1.5	1	12	• .5	.표	: i	910 212	-	/1/2	0420 PET 1	indford, Grag. to Hagman, Grag.	Trace of laing Trace of laing
800/s ,300	16	1	10	8.5	,3	3.8	.3	18	.4	164	- 1			Galif. Midded, Calif. to Los Angeles, Calif.	Trace of rime and more mixings
#,000 P	24	1	a :	11,1	م ب _د	1,1	,		1,1	\$40	-8	y/102/102	0610 HOT A	Bron, Colo, to Horsh Plante.	Light rise ios
00/8,400 12,500	22	1	ee :	19+ 11.7	4 سۇ:	٠. ا	.24	#		<u>p.</u>	اندا				Light rise ice
10,000	- 1 am		•	4.0 :	13 -	:: :.	3	. 26 i.	- 1	끘			0300 Her	Cuthinspale, H. T. of Fart Bridger, tyo. Cits, Dank to Leein, Wash	Trees rise in strutesamble alou light rough ice - mixture ice an
13,100 100/16,600 12,000	뀵	请上	냺	5.3 4.3	∵a	3.0	4	4	,ē	點「	-			to Rivers, Wyo, edicine Ses, Ryo. Ok Massain, Nyo. to Ello, Sev.	Truck rime ice Truck rime ice

TABLE 1. - Continued. MEASUREMENTS AND CORRELATED CESERVATIONS OF ICING CONDITIONS ENCOUNTERED DURING ROUTINE AIRLINE OPERATIONS FROM NOVEMBER 1951 TOROUGH JUNE 1852

(b) East Coast (U. S.) routes

Pressure altitude, a ft	Mori- sontal satent	icing	heri- sontal	ieing rate	Average liquid- water	بملاما	mm cont. g incide in snoou	g t	Onleu- lated total	Aver- age true	Cor- rested mir	Date	Time (local)	Location of encounter	Flight observations and occurents
	coun- ter,	dente for en- south- ter	wi.	for all icing inci- dents, in./hr		age	iverage liquid- mater non- sent, g/ou m		focusi- lation, in,	speed.	ature,	:			
20,200/18,400 18,000/11,900	135 76	3 2	84 61	8.5 5.2	0.4	7.0	0.4	70 56	2,0	279 303	-16 -16	11/1/11	1030 057 1185 157	B of Jackson, Miss. 20 Mi MRR of Horfolk, Va.	No comments Skinning tops at 15,500 ft - clear 10,000 ft
10,700/13,500 7,800 7,800/7,300	25 17 19	2 1 1	15 17 19	7.4 9.4 10.2	.5 .5	10.0 9.4 10.2	.7 .6 .5	8 17 19	.5 .5 .7	229 260 234	-9 -17		1426 EST 1550 EST 1703 EST	Vicnity of Lakehuret, N. J. Visinity of Wabsh River, Ind. Between Cleveland, Chic and Ypsilanti, Mich.	Climb through cloud deck He comments
18,700		1	9	2,3	.1	2,3	,1		.1	831	-0		10335 337		No comments
14,400 12,800 4,400/3,400 4,400/5,100	397 8 23	8 1 1	154 9 23 6	9.5 4.7 6,6 8,7	1 .2 .4 .5	2.5 4.7 5.8 8.7	.1 .4 .6	54 9 25 8	1.3 .8 .8 .4	297 316 181 185	-8 -8	18/9/61	1340 007	Missi, Fla. to Washington, D. C. 15 Mi S of Chicago, 111. 5M of St. Louis, No. 5t. Louis, No. to Louisville, Ky	No coments No coments No coments No coments
5,800/4,700 6,100 4,900/7,000 14,900 14,800/10,100	7 55 55 55 459	1 2 2 1	7 14 50 25 25	12+ 5.7 3.7 8.8 1.8	.8+ .5 .2 .4	19+ 5,6 3,8 6.6 1,5	.# .5 .2 .4	7 10 17 25 110	.4 .8 .4 .6 1.3	234 295 252 292 300	79977	12/10/31	1945 BOY	R of Louisville, Ky. Over Philadelphia, Pa. W of Washington, D. C. Atlanta, Ca. to Hew York, H. Y. Atlanta, Ca. to Hew York, H. Y.	No comments No comments No comments Light precipitation Ident ice on windshield and wings
8,100/9,500	151	4	102	8.0	,4	9,6	,8	78	R.9	275	-9	12/18/51	1400 101	Hemark, M. J. to Washington, D. C.	Beavy ioing
15,500 15,700 15,500 5,600/2,800	124 10 65 9	1 1 2 1	194 10 24 9	2.5 7.8 4.8 8.5	.1 .4 .3	2.5 7.8 3.7 8.5	.1 .4 .2	194 10 20 9	1.0 .3 .4 .8	311 292 293 141	-5 -10 -2 -1	12/20/61 1/4/32 1/4/32 1/6/52	1715 08T 2025 03T	Near Homerk, H. J. 35 Mi E of Birminghes, Als.	Light ising No semments No semments No semments
3,000/3,800 3,300 12,800 11,300	8 11 15 8	1 1 1	8 11 15 8	5.5 7.4 .6 8.6	.4 .4 .1	5.5 7.4 .6 8.6	.4 .1 .8	. 8 11 15 8	.0 ,5 ,1	956 160 295 295	24 P 2	1/6/52 · 1/7/58 1/8/32	11.50 EST	Mear Leniaville, Ky. Frenklin, Mass. to Boston, Mass. 10 Mi S of Charlotte, W. C. Lakekmest, W. J. to Atlantie	No comments Anov Eo comments Some stow
14,500	12	1	12	1.4	,1	1,6	.1	12	.1	240	-7	1/9/54	2010 EST	City, M. J. Mooky Mount, W. C.	To comments
15,100	28	1	26	4,2	•5	4.2	٠5	26	,4	275	-4	1/12/52		Grammsboro, N. G. to Blackstone, Vm.	
90,200 90,300 11,800	82 9 191	14	82 5 85	4.8 8.5 1.7	,5 ,5 ,1	1.0 8.5 1.7	.1 .5 ,1	9 9 20	:\$:4	254 260 260	-20 -20 -6	2/15/52 2/15/52	12155 CST	Louisville, My. to Atlanta, Ge, Louisville, My. to Atlanta, Ge. Over Lomberton, N. C.	Constant loing and surbulence Constant loing and turbulence Rain and slight slushy los
14,800	120	8	80	2.2	.2	4.1	.2	60	.9	501	-5	2/15/62		Richmond, Va. to Rooky Hount, N. O.	Moderate to heavy loing
18,900	36	R	34	2,2	.1	2.7	,2	23	٠.٥	272	-15	2/16/52	0230 EST	150 Mi off count Jacksonville, Fla.	No ecomenta
17,700/9,100	291	7	78	5,1	.2	2.4	.1	28	.9	277	-15	2/18/52	1320 137	Huntington, W. Va. to Louisville, Ey.	No comments
11,400/12,800	227	6	160	2,8	,2	3.7	.2	87	1.5	290	-1	1/27/52	2125 587	From Susquehamma River to Washington, D. C.	No economics
15,400	5R9	9	200	4.5	9,	5.1	,3	67	3.2	206	-	1/26/02	i I	Between Birmingham, Ala. and Jackson, Riss.	No comments
12,800/2,000	57	5	25	8.7	.3	2.1	.2	15	,5	190	-10	1/26/52	1345 BBT	Manhington, D. C. to Mewark, H. J.	Iming from 19,000 ft down to ground
15,100 11,800 14,400	90 59 91	1 2	90 39 91	.9 3.1 10.6	.1 .2 .6	10.8	.1 .2 .6	20 34 91	.1 .4 5.4	298 294 286	-15 -2 -4	1/24/52 1/30/62 2/1/32	0914 C5年	20 Hin S of Hewark, H. J. 30 Hin E of Houston, Tex. Between Alexandria, Le. and	Ho comments No comments No comments
5,900	•	1	4	6,1	.3	8.1	٤,	4	.1	957	<u></u>	2/20/52	2238 RST	Bearment, Tex. Cleveland, Chie to Detroit, Mich.	Thin ice on boots, visible only on
15,900	167	4	115	3,8	.2	5.0	.5	67	1.5	267	-12	2/24/62	0903 X3T	125 Mi due E Labelmost, E. J.	ground No comments
3,600	47	1	47	1,8	,1	1.8	.1	47	.3	259	-7		1440 . R 39	Bebreen Gleveland, Ohio and Youilanti, Mich.	Scattered anog
3,700/3,100	13	1	18	4,3	.3	4,3	.3	13	,8	196				Ypsilanti, Rich, Between Ypellanti, Mich. and (Neveland, Ohio	Heavy overcast
9,700/11,400 6,900/9,000 3,100/8,900 16,000	14 17 56 15	1 2 1	14 17 26 15	6.1 7.5 5.5 1.5	.5 .6 .4	5,1 7,5 5.4 1.5	.5 .6 .4	14 17 16 15	,3 .5 .7	274 261 198 293	-8 -8 -0	3/10/8e	1020 057	Over Leuisville, Ky. Out of Chiotego, Ill. Out of Labourdia Field, H. Y. 100 Mi E of H. J. scant	No communication of the second

"Two altitudes separated by / indicate beginning and end of ising during climb or descent.

TABLE I. - Continued. MEASUREMENTS AND CORRELATED OBSERVATIONS OF ICING CONDITIONS ENCOUNTERED DURING ROUTINE AIRLINE OPERATIONS FROM NOVEMBER 1951 THROUGH JUNE 1962

(c) Northeastern (U.S.) routes

Pressure altitude, a ft	Hori- zontal extent of en-	icing	hori- sontal icing,	ioing rate for all	Average liquid- water content	loin	num cont g incide in encou	nt .	Calcu- lated total ice	Aver- age true air-	Cor- rected sir temper-	Date	Time (loosl)	Location of encounter	Flight observations and comments
	ter,	dents for en- coun- ter	#1	icing inci- dents, in./hr	for all icing inci- dents, g/cu m	Aver- age icing rate, in.	Average liquid- water con- tent, g/ou m		accumu- lation, in.	mbp abaseg`	temper- ature, C				
6,800/7,900 5,200 8,400/3,000	15 18 56	2 1 3	6 18 21	8.0 9.8 5.4	0.8 1.0 .5	9.2 9.8 5.2	0.9 1.0 .5	5 18 12	0.4 1.2 .6	181 154 176	-3 -3 -9	2/1/52 2/2/52 2/2/62	1120 EST	Over Huntington, Vt. Lebanon, W. H. to Worthfield, Vt Morthfield, Vt. to Burlington, Vt.	No comments Rapid ice accumulation Light icing
4,300 5,200/2,100	8 44	1 2	6 26	6.6 3.5	.5 .5	5.6 5.8	.5 .4	6 25	.2 .5	169 156	-2 -3	2/5/52 2/1/62		Near Presque Isla, Maine Woodstock Conn. to Worcester, Mess.	No ice visible No comments
4,100/5,300	55	2	59	6.6	.6	7.7	.7	22	1.7	165	-8	2/7/62	0916 EST	Woodstock, Conn. to North Scikuate, Mess.	Light to moderate rough accumula-
1,600/2,200	37	2	18	3.0	.3	3.5	.4	8	.3	158	-4	2/7/52	1006 EST	Boston, Rass. to Portsmouth, N. H.	Light rime on windshield and boots
2,200/1,000 7,100/5,500	52 38	2 5	41 29	7.0 4.1	:7	8.1 5.6	.s	24 14	1.8 .7	185 175	-5 -6	2/7/52 2/11/52	1557 EST 1800 EST	Squantum, Hass. to Hyannis, Hass. Hontpelier, Vt. to Burlington, Vt.	Light icing Very thin ice
2,400	21	1	21	3.8	-4	3.8	.4	য়া	.5	160	– 5	2/11/52	2000 1897	Montreal, Que. to Burlington, Vt.	Very thin ice
2,900/2,200	11	1	11	7.7	.7	7.7	.7	11	45	170	-3	2/16/52	1842 EST	New Canaan, Conn. to Port Chester, M. Y.	Trace of ice
8,500/4,500	8	1	9	4.0	-3	4.0	.\$	9	.2	185	-9	2/18/52	1845 EST	Montpelier, Vt. to Eurlington, Vt.	frace of ice .
4,500/6,500 4,000 1,800	15 3 12	1 1	15 3 12	6.3 12+ 6.1	.7 1.1+ .7	6.5 1 <u>2+</u> 6.1	1.1+ .7	15 3 12	.6 .9 .5	146 185 142		2/19/52 2/22/52 2/22/52	1445 EST	Out of Burlington, Vt. Salem, Com. to Providence, R. I. Over Bedford, Mass.	Light rime Light rime Trace of ice
2,200/3,900 3,600/3,000 5,200	52 30 9	2 2	39 5 9	5.8 7.3 12.0	.6 .7 1.1	8.0 12+ 12.0	.5 1.5+ 1.1	21 2 9	1.5 .2 .8	157 159 171	-8 -8 -2	2/25/52 2/27/52 5/7/52	1515 EST	Vorcester, Mass. to Boston, Mass. Haverbill, Mass to Boston, Mass. Providence, R. I. to Moosup, Conn.	Light rime Trace of ice Rapid ice accemulation
5,200/600 4,000/4,800	57 - 29-	2 .ji.	- ed 555	\$.3 10.7	.6 143	6.5 LO-7	1.8	14 6	.9	167 166	-8	5/7/52 3/1/50	1856 EST 12655 EST	Over Port Chaster, N. Y. Between New York, N. Y. and Bridgeport, Conn.	Rapid ice accumulation Rapid ibs accumulation
5,100/5,500	15	1	1.5	10.6	1.0	10.6	1.0	15	.9	157	-8	3/7/52	2420 EST	Between New York, N. Y. and Bridgeport, Conn.	Rapid ice accumulation
4,900/3,600 5,800 _2,300	16 132 6	1 7 1	16 41 6	7.4 4.5 9.8	.7 .4	7.4 5.5 9.8	.7 .3	16 14 6	.8 1.2 .5	164. 162 165	-20 -14 -2	3/9/52 3/9/52 3/9/62	1355 EST	Bedford, Mass. to Boston, Mass. Boston, Mass. to Bartford, Conn. Over-Vorcesten, Mass.	Light foing Light foing
2,500	22	1	200	5,9	.6	5.9	6	22	.6	164 -	-2	3/9/62 3/9/62	1700 EST	Out of Wordester, Mass.	No comments
6,300/5,800 1,700/1,200	11 1 ⁵⁷	13	12. 14.		5 1111 P	5.0 2.7	1 2 1	11 17. 4)	.3 -2 -1	169 184	l' 5' l	2/18/24	1726 EST 1817 EST	Over Burlington, Vt. Setucen Boston, Rass. and Provided	No comments
2,600	.60	۱ <u> </u>	41	4.6	.4	4.8	.51	38	1.2	168	: 1	3/19/52	1	Between Bangor, Maine and Presque Isle, Maine	Light ice
3,800/5,800	30	1	30	6.5	.7	6.5	.7	30	1.2	164		3/20/62		Presque Isle, Maine to Bangar, Maine	Light los
8,000	8	1	. 9	5.0	5	5.0	.5	9	.2	178		3/21/62		Concord, M. H. to Burlington, Vt.	· ,
6,000	24	3	19	4.1		5.7	.8	. 8	.5	165		3/21/62		Burlington, Vt. to 8. of Montpelier, Vt.	Very light rime
2,000/1,500 4,800/2,200	21 53	1 2	21 37	3.8 3.7		3.8 3.9	:4	21 27	.5	159 159	; -2 ; -4	\$\frac{2}{2}\sqrt{\frac{52}{22}}	0926 EST	Boston, Mass. to Concord, N. M. Concord, M. H. to Lebanon, M. H.	Very light rime Very light rime

arms altitudes asperated by / indicate beginning and end of loing during climb or descent.

TABLE I. - Constided. MEASUREMENTS AND COMMELATED DESERVATIONS OF ICING CONDITIONS ENCOUNTERED DURING ROUTING ATRIDES OFFERATIONS FROM NOVEMBER 1851 TERROUGH JUNE 1952

									(d) 1	rensoon	tinente)	Canada :	routes		
Pressure altitude, a ft		icing	bori- sontal		liquid-	loin	enum cont g incide in encou	nt	Calcu- lated total	Aver- age true	Cor- rested air	Date	Time (local)	Location of encounter	Flight observations and comments
	of en- coun- ter, mi	inci- dents for sn- soun- ter	icing,	for all loing inci- dents, in./br	sontent for all loing inci- dents, g/ou m	age	Average liquid- water con- tent, g/cu m		ice Accumi- lation, in.	air- speed, mph	tempor- ature, OC				
4,800 18,500 6,200/8,500	37 61	1 1 3	1 57 34	7.9 5.8 7.0	0.9 .4 .5	7.9 5.8 7.1	0.9 .4 .5	37 23	0.1 .9 1.1	146 248 220	-3 -26 -4	11/21/51	1 2210 PST	Approach to Saskatoon, Sask. Over Grascent Valley, B. C. Between Wigston, Ont. and Gore	No comments Toe on windshield No comments
15,400	16	a	7	4.1	.3	5.0	.5	4	i,	240	-21	11/25/51	2015 EST	Bay, Ont. Between St. John's, Newf. and Montreal, Que.	frace of rise in altostratus elou-
8,000 15,900	85 28	3 2	35 B	4.9 1.6	;4 ;1	7.4 1.5	,5 .1	15 6	:1	222 168	-15 -6			Over Lake Superior 10 Hi B of London, Ont.	No comments
							. (e) Paci	fic Coss	t route	: 5mitt	le, Washi	ngton to	Alaska	
9,000 5,300/11,600 11,100 4,500/10,700 8,100/8,800	147 153 6 112 41	10 5 1 5 2	80 80 60 80 21	1.9 2.1 1.9 1.8	0.2	2.7 2.7 1.9 2.2 2.8	0.2	57 23 6 27 14	0.8 .7 .1 .6	201 199 215 201 205	-6 -6 -10 -10	1/26/52 1/26/52 1/26/52 1/26/52 1/26/52	0850 PST 0850 PST 0850 PST	Pat Bay, B. C. to Comex, B. C. Pat Bay, B. C. to Comex, B. C.	Light to moderate glame No comments No comments No comments No comments
5,300 9,800 10,000 8,400 8,900	6 15 65 86 4	1 3 2 1	6 15 28 31 4	1.5 1.5 2.6 2.6 5.0	.1 .2 .2 .4	1.5 1.6 3.5 2.2 5.0	,1 ,2 ,2 ,4	6 15 11 24 4	.1 .1 .4 .1	203 219 217 208 218	-10 -6 -6 -8	1/26/52 1/26/52 1/26/52 1/26/52 1/21/52	0225 PST 0250 PST	Pat Bay, B. C. to Comox, B. C. Fat Bay, B. C. to Comox, B. C. Pat Bay, B. C. to Comox, B. C.	No comments No comments No comments No comments No comments No comments
8,100 7,100/2,500	6 84	1. 2.	Б 17	4.1 1.1	.5 .1	4.1 1.4	.5 .1	8 11	:1	194 170	-8 -7	1/31/82 8/7/52	0810 PST 1016 PST	Pat Bay, B. C. to Comor, B. C. Banks, B. C. to Annatte Island, Alaska	No noments Trace of ice
2,800/8,500	30	1	30	1.9	.2 -	1.9	.52	30	.3	201	-9	9/7/52	1505 PST	Annette Island to Gustavus, Alaska	Light freshing rain at start of climb
7,800/8,500	17	1,	17	2.7	. 2	2.7	.8	17	.2	206	8	2/1/52	1730 PST	Sistere Island, Alanka to Haines,	
10,700	185	5	69	2.2	.2	2,9	.2	36	.7	217	-15	2/13/52	0315 PST	Lyell, B. C. intersection	Light rime, lost 25 mph sirspeed
11,800	10 ·	1	.10	2.1	.2	8.1	.2	10	.1	204	-27	2/14/52	1430 PSP	Between Gustavus, Alaska and Haines, Alaska	Trace of rise
10,300 7,800/5,600 8,700	8 24 78	1 1 5	. 8 24 22	1.0 2.5 3.5	,1 ,2 ,2	1,0 2.5 2.1	.1 .2 .2	8 24 11	.1 .3 .3	226 205 224	-a -11	2/16/52 5/2/52 5/8/52	1500 Por	Over founding, Wash. Over Annette Island, Alaska Bahar Iska, N.W.T. to Lyall, B. C.	Trace of rime Trace of rime Total accumulation considered trace
8,700	55	ı	53	1.5	.1	1.3	.ŀ	53	.2	200	-5	3/7/52	4,145 PST	Amnette Island, Aleska to Poteraburg, Aleska	Very soft ice
9,500 10,000	27 77	1 2	27 · 88	2.7 3.0	.2	2.7 3.2	.2	27 49	1,0	206 209	-5 -5	3/7/82 3/8/62	1245 PST 2550 PST	Over Juneau, Alaska 100 Mi M of Port Hardy, Veneouver Island	No comments Airspeed dropped from 182 to 160 mph
10,700 10,600 10,600	151 11 4	5 1 1	48 11 4	3.7 2.5 4.8	.5 .2 .5	4.7 2.5 4.6	.3 .2 .3	15 11 4	.8 .1 .1	221 227 226	-11 -9 -13	4/12/52 4/12/52 4/12/52	0330 PST	Hear Queen Charlotte Straits Hear Queen Charlotte Straits Hear Patersburg, Alaska	Mixed rime and snow Rime ice, used 800 hp Light rime
5,500/9,200 5,900/10,100 8,900 8,200/4,900 9,800/11,900	25 206 7 60 71	\$ 5 1 2	15 20 7 60 25	5,7 3.5 2.3 3.4 5.1	.5 .2 .3	4.9 2.8 2.3 5.4 8.1	.4 .2 .2 .3	10 10 7 60 14	,3 ,5 ,1 1,0	192 209 219 211 213	-6 -18	4/18/52 4/18/62 4/19/62 4/25/52 4/98/52	1015 PST	4 Mi S of Comox, B. C. 4 Mi S of Comox, B. C. Seattle, Wash. to Juneau, Alaska Seattle, Wash. to Juneau, Alaska	Intermittent light rime No comments Intermittent loing Light loing Light loing

^{*}Two altitudes separated by / indicate beginning and end of loing during climb or descent.

F-r-

£-...

13

4

·2

1

÷=

TABLE II. - MEASUREMENTS ONLY OF ICING CONDITIONS ENCOUNTERED DURING ROUTINE AIRLINE OPERATIONS FROM NOVEMBER 1951 THROUGH JUNE 1952

(a) Transcontinental and Pacific Coast (U.S.) routes Maximum continuous Pressure Hori-Number Total Average Average Calcu-Averaltitude, a icing icing incident within encounter zontal horilated age ft extent icing zontal rate water total true of enincidisfor all content airice Average Hori-liquid- zontal coundents tance icing for all Averaccumuspeed, ter, mi lation, for in inciicing age mph enicing, dents inciicing water . exin. counmí in./hr dents. rate, con- tent, in. ter g/cu m tent, g/cu m mi hr 4,100 0.5 75 4 30 3.9 0.4 6.8 16 0.7 197 7.8 3.7 5,000 6 1 6 7.8 .7 6 .3 192 5,200 я 1 3.7 .2 231 8,100 13,400/14,200 58 3 27 2.9 .2 2.5 .2 204 13 4.9 13 4.9 .4 .4 13 .3 192 15,800 15 .2 .2 .7 15 1 15. 3.8 3.8 .2 230 15,000/14,100 16 īš 10.5 16 .7 1.3 10.5 233 13,600 11,400/10,300 12,600/11,800 40 ī 40 6.1 .i 6.1 .4 40 21 2 1.9 13 254 23 23 6.1 .4 6.1 .4 .6 226 9.800 17 ٦ 17 .1 .1 1.4 1.4 17 .1 249 ž 8,900 .52.27 50 38 6.6 . 5 6.4 31 1.2 230 251 12,600 3.9 8 8 .2 3.9 8 .7 13,100 56 56 .ē 56 242 12,900 56 2 49 10.4 .7 10.3 45 2.3 224 10,700/5.400 68 2 60 4.5 .3 5.0 .4 50 1.3 213 5,400 11,300 8,100 1.6 5.4 3.2 .1 1.6 5.4 3.2 **4** 8 .1 4 1 .1 4 214 8 111 .2 244 197 8 2Ö .3 20 20 8,500 1.5 1.5 .1 .1 .1 221 6,900 3,600/2,300 3,300 2,700 .6 А 1 8 8.5 .6 8.5 7.5 8 . 3 225 141 165 26 111 26 7.5 . 6 6 26 6 1.0 6 10.5 1.0 10.5 6 12 1.6 .7 .7 12 .1 1.6 12 184 4,000/2,400 ī 12 12 .7 184 9.9 12 3,700 1 3 3 7.5 .6 7.5 64.52.5 3 . 1 197 4,800 7,100/4,900 9,700/7,400 13,300 8 1 6.1 6.1 4.7 ě .2 229 .4 .5 29 2 21 7.6 12 .6 250 18 1 18 3.9 .2 3.9 .3 269 50 50 4.2 . 3 4.2 50 1.1 230 .2 .5 .2 6,100 12 17 1 12 3.2 5 3.2 12 .2 230 8,300/7,100 8,100 5,400/6,000 7.8 ì 17 .6 7.8 17 204 2.1 2.1 228 8 8 8 6 3.8 . 4 3.8 1 õ 174 6,500/5,000 21 2 11 1.0 .1 1.0 14 ī 214 13,500 12,600 13,400 54 235 3 3.5 .2 3.2 14 .2 217 ĭ 29 29 .5 4.4 5.9 4.4 5.9 29 77 . 7 221 77 ī 77 2.5 193 13,400 63 54 6.2 .5 6.3 . 5 31 1.8 189 4 13,400 28 2 18 4.2 .3 4.8 14 212 .4 12,000 5 171 3 151 8.3 .6 6.9 77 6.3 210 11,000 8,900 6,300/3,200 5,100/6,400 42 7 42 4.2 .3 4.2 42 .8 227 151 5 5.8 2.7 95 . 4 8.3 42 227 2 47 ٠5 1.0+ 41 7.2 12+ 32 1.7 189 11.0 8 8 11.0 1.1 1.1 8 .6 162 4,200/3,500 4,300 13,000 13,300 ì 24 24 2.0 2.0 24 .2 235 100 2 76 7.5 . 6 7.8 .6 66 2.8 208 12 12 111 12 9.3 .6 9.3 а 5 12 .5 231 12 4.1 . 3 4.1 12 . 2 232 3,800 41 41 10.5 10.5 .8 .8 41 2.1 203 10,300 8 1112 8 .7 9.6 9.6 . 7 8 .3 228 5,300 8,300 3.0 2.7 3.0 2.7 .ź 216 .2 18 18 .2 .2 213 8.100 66 2.4

. 6

6.8

. 5

56

198

8.0

59

aTwo altitudes separated by / indicate beginning and end of iding during climb or descent.

TABLE II. - Continued. MEASUREMENTS ONLY OF IGING CONDITIONS ENCOUNTERED DURING ROUTINE AIRLINE OPERATIONS FROM NOVEMBER 1951 THROUGH JUNE 1952

(a) Transcontinental and Pacific Coast (U.S.) routes - Continued

(a	1 114118	COLLCTILE	IICAL AIR	l Pacifi	e coast	(U.S.)	routes	- CONCI	nueu	
Pressure altitude, a ft	Hori- zontal extent of en-	icing	Total hori- zontal dis-	icing	Average liquid- water content	icin	mum cont: g incide in encou	nt	Calcu- lated total ice	Aver- age true air-
	coun- ter, mi	dents for en- coun- ter	tance in icing, mi	icing inci- dents, in./hr	for all icing inci-dents, g/cu m	Aver- age icing rate, in. hr	Average liquid- water con- tent, g/cu m	Hori- zontal ex- tent, mi	accumu- lation, in.	speed, mph
9,600 11,500 6,200/4,700 6,300 12,300	89 16 15 60 15	31131	58 16 15 4 1 15	7.4 8.8 3.3 4.7 3.4	0.56242	9.4 9.8 3.3 5.3 3.4	0.6 .6 .2 .4	35 16 15 25 15	1.8 .6 .3 1.2	232 246 220 188 229
7,100/10,100 7,000 9,200 12,400 9,300	55 14 47 20 161	2 1 2 1 4	14 14 37 20 111	7.7 2.2 3.6 3.7 3.7	เก็นเกิด	7.7 2.2 2.9 3.7 4.5	.6 .2 .3	10 14 30 20 72	.5 .2 .7 .3 2.0	206 208 200 241 215
4,100 5,300/5,900 11,800 9,700/8,300 9,600/3,900	65 9 64 · 28 71	1 1 1 2	65 9 64 28 42	4.5 6.6 4.9 6.9 9.1	.4 .6 .4 .4	4.5 6.6 4.9 6.9 9.3	.4 .6 .4 .4	65 9 64 28 35	1.4 .3 1.4 .8 1.8	202 177 225 2 4 0 212
7,700/3,600 6,100 8,300 12,400 10,200/9,700	67 100 30 100 19	3 2 1 4 1	28 92 30 57 19	1.6 9.0 2.8 5.1 3.7	.1 .7 .2 .4 .3	1.2 8.3 2.8 7.0 3.7	.1 .7 .2 .5	18 53 36 21 19	.3 4.4 .4 1.4	212 197 223 212 227
13,500 4,400/3,000 6,500/1,600 9,200 6,200/2,900	8 56 57 102 64	1 2 7 3	8 40 24 23 22	2.2 2.9 1.3 2.3 3.9	.2 .1 .2 .3	2.2 2.5 1.5 2.9 3.2	.2 .1 .2 .3	8 28 14 19	.2 .6 .3 .3	239 198 163 227 192
5,300 7,400/2,300 14,800 2,200/1,500 1,300/2,900	21 96 15 5 8	1 3 1 1	21 53 15 5 8	1.9 3.3 6.4 4.5	.1 .3 .5 .5	1.9 4.0 6.4 4.5 7.4	.1 .3 .5 .5	21 40 15 5	.2 1.1 .4 .2 .4	208 198 220 140 163
5,100/5,800 9,200/11,400 4,000 5,000 5,600/7,600	7 69 26 9 24	1 3 1 1	7 29 26 9 24	4.8 4.2 6.7 6.8 10.3	.4 .3 .5 .6	4.8 4.8 6.7 6.8 10.3	.4 .3 .5 .6	7 29 26 9 24	.2 .7 1.0 .4 1.4	221 217 197 189 205
11,400 13,700 9,700/7,600 9,700 6,500	25 270 84 119 75	2 7 2 3 2	22 45 46 31 56	10.1 4.5 7.0 8.7 5.2	.8 .3 .5 .6	9.2 5.6 7.7 7.8 4.8	.7 .4 .5 .5	14 19 38 23 44	1.0 1.0 1.4 1.3	215 225 228 231 238
13,200 10,000/7,100 9,500/10,700 11,500 13,600	11 71 66 23 63	1 2 1 1 2	11 .49 66 23 48	4.3 3.7 5.7 8.9 8.1	.3 .4 .6	4.3 3.9 5.7 8.9 7.1	.3 .4 .6	11 35 66 23 37	.3 .8 1.8 1.0	221 212 209 227 221
5,900 10,900 6,500 8,800 6,900	22 31 4 65 34	1 1 1 2	22 31 4 65 11	5.9 2.1 9.7 9.4 2.2	.4 .1 .7 .7	5.9 2.1 9.7 9.4 2.8	.4 .1 .7 .7	22 31 4 65 8	.6 .3 .2 2.8	219 230 226 216 225
5,600/4,100 4,600/5,000 6,400 4,600/3,700	16 7 37 16	1 1 1	16 7 37 16	3.4 7.0 9.2 5.7	.2 .6 .7	3.4 7.0 9.2 5.7	.2 .6 .7 .5	16 7 37 16	.2 .2 1.7 .5	243 209 202 189

 $^{^{\}mathbf{a}}\mathsf{Two}$ altitudes separated by / indicate beginning and end of icing during climb or descent.

TABLE II. - Continued. MEASUREMENTS ONLY OF ICING CONDITIONS ENCOUNTERED DURING ROUTINE AIRLINE OPERATIONS FROM NOVEMBER 1951 THROUGH JUNE 1952

(a) Transcontinental and Pacific Coast (U.S.) routes = Concluded

(a) Trans	contine	ntal an	d Pacifi	c Coast	(U.S.)	routes	- Concl	uded	,
essure titude,a ft	Hori- zontal extent of en- coun- ter, mi	icing	Total hori- zontal dis- tance in icing, mi	Average icing rate for all icing inci- dents, in./hr	liquid- water	icin with	num cont; z incider in encoun Average liquid- water con- tent, g/cu m	nt nter	Calcu- lated total ice accumu- lation, in.	Aver- age true air- speed, mph
4,200/5,000 7,600/4,000 11,400/5,600 7,700/5,600 6,200/8,400	7 40 169 106 17	.1 1 5 3	7 40 81 23 17	6.0 3.8 3.7 5.4 6.8	0.5 .3 .4 .6	6.0 3.8 3.0 2.8 6.8	5.3226	7 40 34 13 17	0.2 .7 1.6 .8	222 216 230 198 174
10,900/8,300 8,300/6,500 8,500 9,300 11,200	91 50 39 8 22	3 2 1 1	30 28 28 8 22	6.5 3.9 4.8 4.8	.4 .3 .2 .4	5.6 4.7 2.1 4.2 4.8	.4 .2 .4 .4	19 18 18 8 22	1.0 .6 .4 .2 .5	228 212 213 169 217
11,000 7,200 6,900/4,500 10,600 5,400/4,800	46 4 16 4 32	3 1 2 1 2	31 4 9 4 25	3.8 4.6 7.2 2.0 6.4	.3 .5 .1 .5	3.8 4.6 7.0 2.0 6.2	B.56-15	19 4 6 4 14	.6 .1 .4 .1	232 234 186 231 212
4,800/8,400 14,700 3,700/2,800 3,700 3,600	38 37 14 35 22	2 1 1 1	21 37 14 35 22	6.5 2.5 3.9 2.7 1.5	52 52.1	7.6 2.5 3.9 2.7 1.5	មាលលេខ	14 37 14 35 22	65.34.2	206 247 214 208 220
7,600 12,200 10,200/11,500 6,400/8,600 12,300/11,200	89 25 13 107 61	1 1 2 1	89 25 13 77 61	3.7 2.5 7.5 7.5 4.3		3.7 2.5 7.5 7.9 4.3	900000	89 25 13 66 61	1.5 2.5 2.2	223 247 190 221 227
10,200/9,100 7,300/6,800 13,100 8,300/8,700 9,700/8,500	28 9 224 33 11	1 7 ·1 1	28 9 35 33 11	5.6 3.6 3.8 11.7 9.5	.4.3 2.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	5.6 3.6 6.6 11.7 9.5	4.35.586	28 9 8 33 11	.8 .2 .7 1.8	209 173 231 219 229
6,300/8,400 7,000 7,100 10,600/11,200 11,200	99 12 23 23 34	1 1 2 2	99 12 23 11 15	5.2 1.5 1.1 8.1 8.5	.4 .1 .1 .6	5.2 1.5 1.1 6.1 8.0	4 1 4 6	99 12 23 8 7	2.6 .1 .1 .4 .6	212 238 233 228 224
11,200 7,000/3,700 6,100/4,200 13,400 11,900	53 64 22 38 8	. 21 22 1	12 64 11 30 8	7.1 6.3 2.3 2.7 1.9	.5 .4 .2 .1	5.3 6.3 3.2 3.3	4 .3 .2 .1	. 8 6 4 8 19 8	.4 2.0 .2 .4 .1	230 226 167 227 231
11,900 : 10,400 11,100/10,200 10,900/9,600 13,400	40 39 25 20 24	3 1 2 1	22 39 25 11 24	5.6 12.0 3.4 4.4 2.3	.4 .9 .3 .4	4.8 12.0 3.4 5.1 2.3	.l3 .l9 .l3	11 39 25 8 24	.6 2.2 .4 .3	221 215 184 170 237
11,200 12,200 1,600/1,500 4,000/8,500 8,500	106 82 9 136 41	22132	19 66 9 119 37	4.6 4.8 1.6 6.5	.3 .2 .5	6.2 4.5 1.6 6.8 1.5	บัณ• ี นิตกันส์ • เกีย	15 54 9 . 51	.5 1.6 .1 3.8	227 233 138 204 222
1,800/6,000 6,200/5,200 11,000 7,100/8,100	168 11 91 37	2 1 3 1	158 11 53 37	7.7 5.7 4.4 8.5	.6 .4 .3	7.5 5.7 3.0 8.5	6-1-017	102 11 41 37	6.3 .3 1.1 1.6	198 215 226 203

 $^{^{\}mathrm{a}}\mathrm{Two}$ altitudes separated by / indicate beginning and end of icing during climb or descent.

TABLE II. - Continued. MEASUREMENTS ONLY OF ICING CONDITIONS ENCOUNTERED DURING ROUTINE AIRLINE OPERATIONS FROM NOVEMBER 1951 THROUGH JUNE 1952

(b) East Coast (U.S.) routes


			(b) Ea	st Coast	(U.S.)	routes				
Pressure altitude, a ft	Hori- zontal extent of en- coun- ter, mi	icing	Total hori- zontal dis- tance in icing,	Average icing rate for all icing inci- dents, in./hr	Average liquid- water content for all icing inci- dents, g/cu m	icin	num cont: g incider in encour Average liquid- water con- tent, g/cu m	nt nter	Calcu- lated total ice accumu- lation, in.	Aver- age true air- speed, mph
14,400 14,700 4,100 4,200 3,800	23 204 5 4 21	1 5 1 1	23 155 5 • 4 21	4.5 3.8 9.7 12.0 2.1	0.3 .2 .7 .7	4.5 4.0 9.7 12.0 2.1	0.3 .2 .7 .7	23 119 5 4 21	0.4	280 298 262 193 265
17,600 2,600/1,200 1,700 3,400/2,800 6,500/3,800	150 5 2 22 22 39	3 1 1 1 3	50 5 22 22 32	1.5 1.7 3.7 7.6 2.7	.1 .2 .4 .5	1.5 1.7 3.7 7.6 1.5	.1 .2 .4 .5	40 5 2 22 5	.3 .1 .1 .9	301 156 150 185 213
13,300/10,300 4,400/4,000 13,800 13,800 4,200	180 9 169 260	4 . 1 3 5 1	35 9 25 107 4	4.4 2.5 4.6 3.4 9.0	.2 .4 .3 .6	2.9 2.5 7.2 4.4 9.0	.2 .4 .3	20 9 10 56	.5 .2 .4 1.3	300 130 299 279 219
4,000 17,300/14,400 7,600/5,200 13,800 13,800	4 20 43 38 80	1 1 2 4	20 43 24 27	6.0 6.8 5.5 .9	.5 .3 .1	6.0 6.8 5.5 1.1	.5 .3 .1	20 43 19 13	.1 .5 .9 .1	225 305 256 283 268
15,400 14,600 21,900 14,000 15,700	23 112 131 51 5	2 5 5 2 1	19 58 74 34 5	.5 1.2 2.1 3.8 6.2	.1 .1 .2 .3	1.0 2.5 2.0 4.2 6.2	.1 .2 .1 .3	9 17 63 30 5	.1 .3 .5 .5	280 250 315 255 284
11,800/15,700 19,700 10,600 11,400/14,500 14,500 5,000/4,700	40 46 244 175 14 31	3 6 7 1	24 26 129 83 14 31	2.3 1.4 3.1 4.3 9.3 5.5	Q.1.0.0.5.5	5.4 1.9 1.8 9.5 5.5	.4 .1 .2 .5	12 21 60 28 14 31	.2 .1 1.5 1.3 .5	241 308 276 276 282 265
			(c) Nor	theaster	n (U.S.)	routes	3			
5,900 5,300 5,300 4,400/2,500 3,400	7 5 71 97 22	1 1 3 2	7 5 71 48 11	12+ 2.1 3.7 3.3 2.1	0.9+	12+ 2.1 3.7 5.2 1.6	0.9+ .1 .3 .4 .2	7 5 71 21 8	0.4 .1 1.5 .8	217 240 205 207 167
2,500/2,000 2,600/4,700 4,800/1,700 1,200 1,700/2,400	16 19 103 6 5	1 1 4 1 1	16 19 79 6 5	6.5 5.1 3.3 3.0 4.1	.5335 .55	6.5 5.1 2.8 3.0 4. 1	.6 .5 .3 .5	16 19 35 6 5	.7 .6 1.6 .2 .1	158 164 163 122 159

 $^{^{\}mathrm{a}}\mathrm{Two}$ altitudes separated by / indicate beginning and end of icing during climb or descent.

TABLE II. - Concluded. MEASUREMENTS ONLY OF ICING CONDITIONS ENCOUNTERED DURING ROUTINE AIRLINE OPERATIONS FROM NOVEMBER 1951 THROUGH JUNE 1952

	,	(d) Tran	scontine	ntal Can	ada ro	utes	<u> </u>		•
Pressure altitude, a ft	Hori- zontal extent of en- coun- ter, mi		Total hori- zontal dis- tance in icing, mi	Average icing rate for all icing inci- dents, in./hr	Average liquid- water content for all icing inci- dents, g/cu m	icin with	mum coning incide in encountry average liquid water content, g/cu m	nt inter Hori-	Calcu- lated total ice accumu- lation, in.	Aver- age true air- speed, mph
4,800 2,900 13,100 13,800 13,300/14,000	4 3 4 5 11	1 1 1 1	4 3 4 5 11	12+ 12.0 1.4 2.5 4.8	1.1+ 1.1 .1 .1 .4	12+ 12.0 1.4 2.5 4.8	1.1+ 1.1 .1 .1 .4	3 4 5 11	0.2 .2 .1 .1	181 174 206 271 227
15,600/9,100 12,700 13,000/4,900 16,500 8,300	52 4 24 17 55	31212	17 4 22 17 35	2.2 5.5 1.8 3.7 7.0	.1 .1 .2 .5 .5	2.8 5.5 1.7 3.7	.2 .5 .1 .2 .5	8 4 14 17 28	.2 .2 .2 1.2	239 193 203 249 208
7,400/5,200 5,400/10,200 7,400/4,900	47 30 19	3 3 1	31 19 19	4.6 4.5 3.9	.4 .4 .2	3.0 5.9 3.9	.3 .4 .2	16. 11. 19"	.8 .4 .3	187 225 224
	(e) Pa	cific C	oast ro	oute: Se	eattle, V	lashing	gton to	Alaska		
10,700/11,800 13,300 13,000 11,000 8,100	183 39 107 21 29	4 3 4 1 2	63 32 55 21 . 18	2.6 2.5 1.6 2.3 1.3	0.2 .2 .1 .2	2.1 3.2 1.7 2.3 1.1	0.2	25 14 26 21 15	0.8 .4 .4 .2 .1	211 211 221 207 218
8,700 9,300 9,700 12,400 9,600	55 23 25 35 147	* 3 1 1 3 5	17 23 25 10 93	2.9 2.2 1.3 1.0	.2 .1 .1	4.6 2.2 1.3 1.0	.4 .2 .1 .1	7 23 25 25 79	.3 .2 .1	205 193 215 193 215
3,800 10,700/9,800 10,500 12,600 9,000	57 18 4 12 13	1 1 1 1	57 18 4 12 13	4.2 1.7 7.5 1.0 3.6	.3 .1 .5 .1	4.2 1.7 7.5 1.0	.3 .1 .5 .1	57 18 4 12 13	1.2 .1 .1 .1	201 212 229 233 200
10,200 13,000 9,800 9,800 9,000/5,300	213 64 10 4 7	10 2 1 1	107 19 10 4 7	1.3 4.2 1.6 1.7 1.8	.1 .3 .1 .1	1.7	.1 .3 .1 .1	23 15 10 4 7	.7 .4 .1 .1	200 224 207 215 212
5,900/9,200 9,500 9,600 10,500 10,500	3 157 11 51 74	1 7 1 3 2	3 50 11 20 17	1.4 1.0 2.6 3.7	.1 .1 .2 .3	1.4 1.2 1.0 3.1 3.4	.1 .1 .2 .3	3_ 13 11 7_ 10	.1 .4 .1 .3 .3	197 201 219 204 202
9,600 9,600 9,600	7 48 21	1 2 1	7 44 21	2.1 2.3 2.0	.2	2.1	.2 .2 .2	7 31_ 21_	.1 .5 .2	197 204 212

^aTwo altitudes separated by / indicate beginning and end of icing during climb or descent.

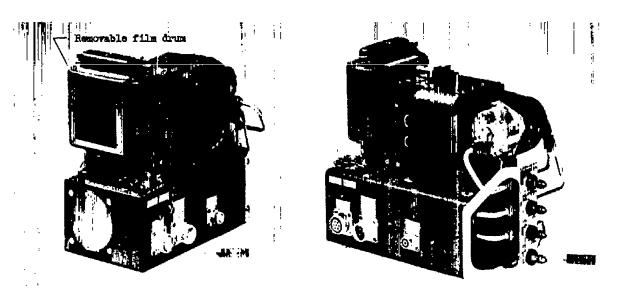

Film recorder

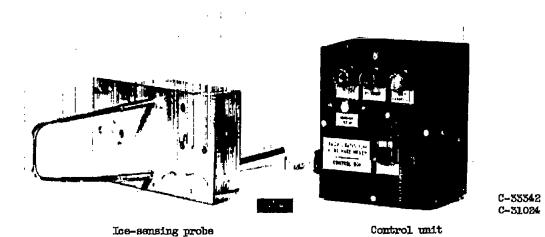


Figure 1. - Components of NACA pressure-type icing-rate meter.

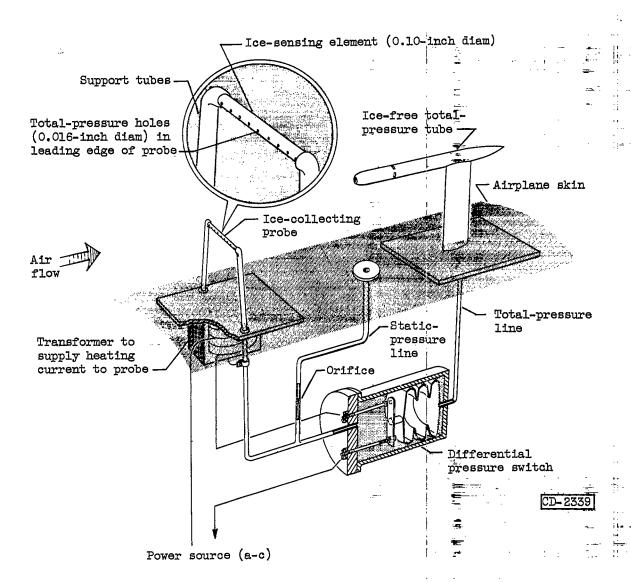


Figure 2. - Schematic diagram of NACA pressure-type icing-rate meter.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

Lewis Flight Propulsion Laboratory

21000 Brookpark Rd. Cleveland 11, Ohio

Recorder Counter No. at Installation:	Data Sheet No. 798 Film Drum No.
	Airline
at Removal:	Icing Meter No. Airplane No.

ICING DATA SHEET FOR STATISTICAL STUDY OF AIRCRAFT ICING

Please Note. These data supplement measurements of rate of icing being recorded on film by NACA icing rate meter installed on this aircraft. Meter automatically starts upon encountering icing (recording light) and stops approximately 15 minutes after end of an icing encounter (flashing light). Numerical recorder counter identifies icing encounters on recorder film and therefore must be entered on this sheet to correlate these data with the film records.

Fill in following information when icing is encountered: (Space on back for any detailed comments such as operation of meter, type of ice, cloud formations, effects on aircraft, etc.)

REC- ORDER COUNT- ER NO.	DATE	FLIGHT No.	TIME AT START OF ICING (LOCAL)	EST'D TIME IN ICING (MIN)	ALT. MSL (FEET)	ALR	EST'D ICING INTEN- SITY	ICING	GEOGRAPHIC LOCATION OF ICING
			-						
					•				
			_						
									
								_	
		<u> </u>							·
									c. 818 (6/9/52)

Figure 3. - Sample of data sheets supplied with each icing-rate meter film drum to obtain supplemental icing information from flight crews.

Figure 4. - Section of data film from pressure-type icing-rate meter recorded during icing encounter by airline aircraft.

- A laffer di

Figure 5. - Ice-sensing probe of NACA pressure-type icing-rate meter mounted on DC-4 aircraft.

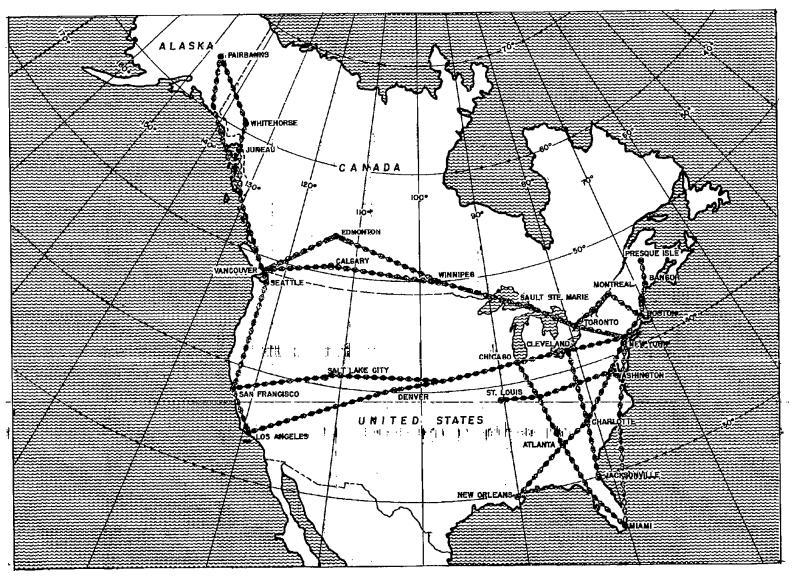


Figure 6. - Air routes covered by the five airlines collecting icing data during 1951 and 1952.

CD-4566

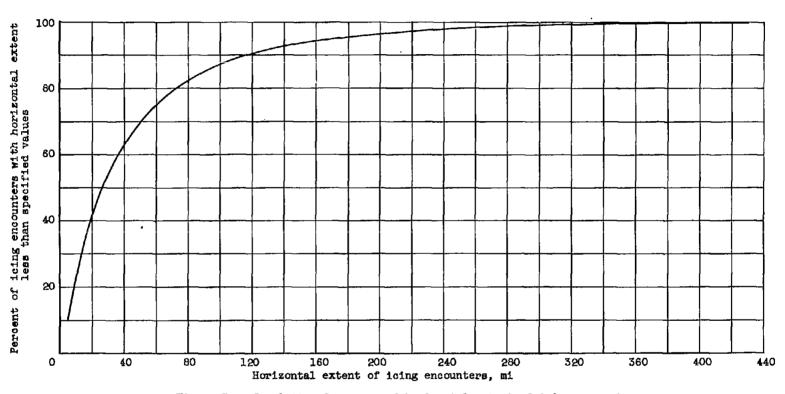


Figure 7. - Cumulative frequency of horizontal extent of icing encounters.

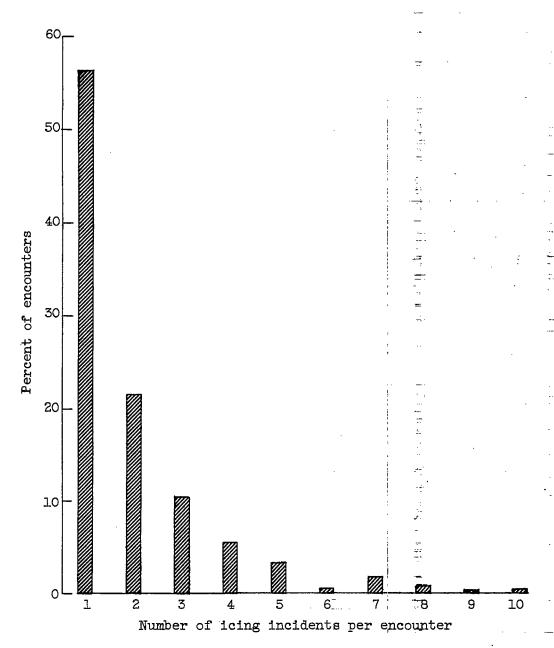


Figure 8. - Frequency distribution of icing incidents per encounter.

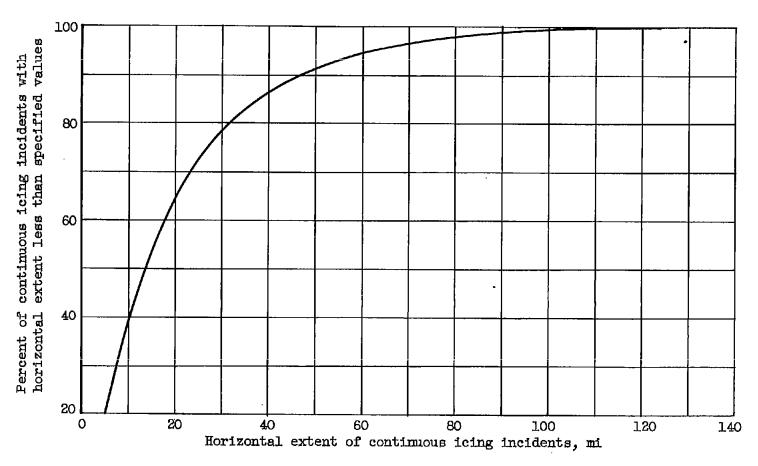


Figure 9. - Cumulative frequency of horizontal extent of continuous icing incidents within icing encounters.

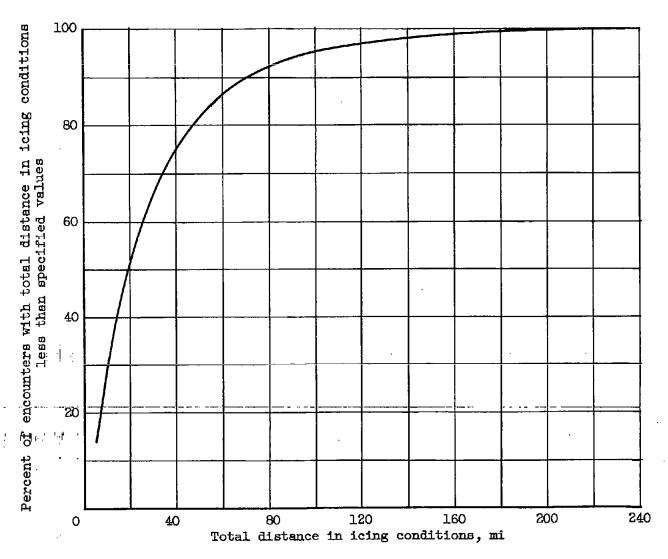


Figure 10. - Cumulative frequency of total distance in icing conditions obtained by summation of all icing incidents within the encounters.

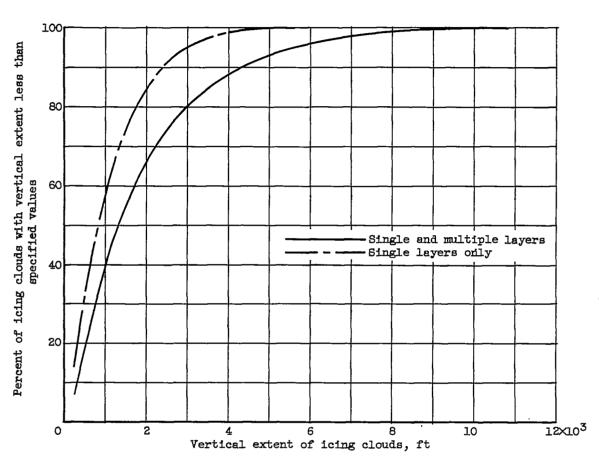


Figure 11. - Cumulative frequency of vertical extent of icing clouds obtained during routine climbing and descending.

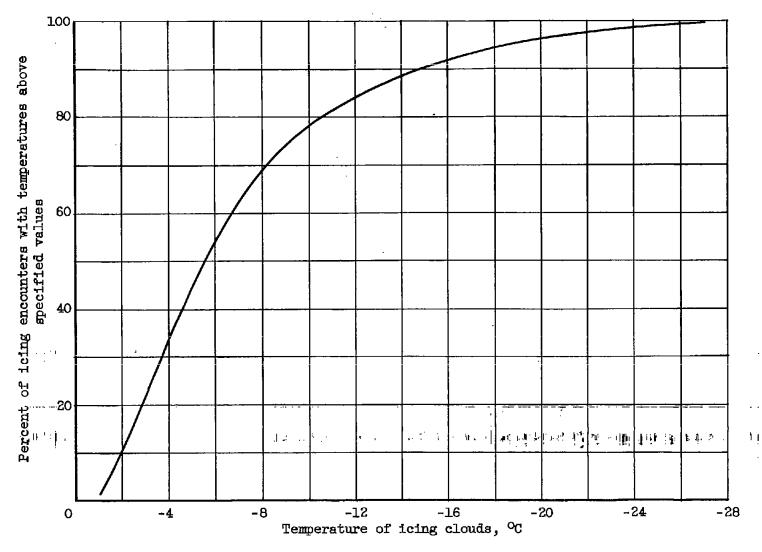


Figure 12. - Cumulative frequency of temperature of icing clouds.

Hade Carlotte Commencer

LTOS

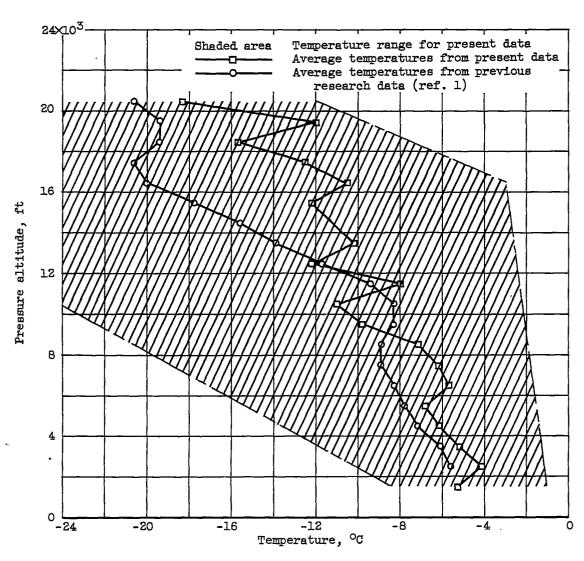


Figure 13. - Variation of icing cloud temperatures with pressure altitude.

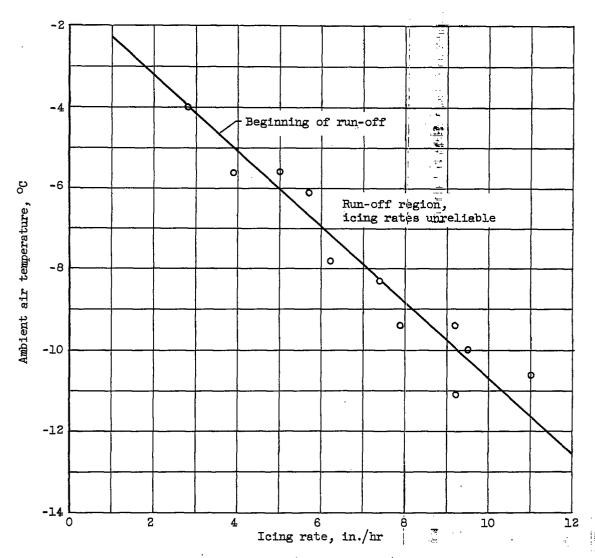


Figure 14. - Incomplete freezing (run-off_limit) as a function of icing rate and air temperature on sensing probe of icing-rate meter. Observed data, 150 to 250 mph.

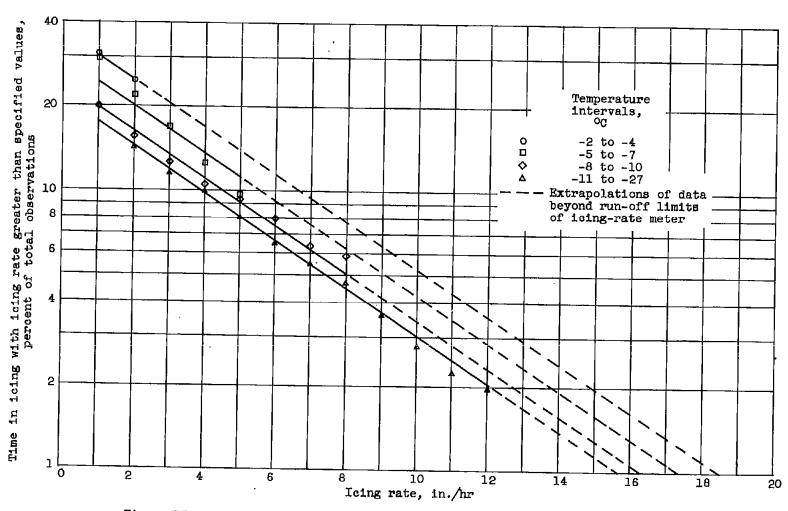


Figure 15. - Cumulative frequency of icing rate at various temperature intervals.

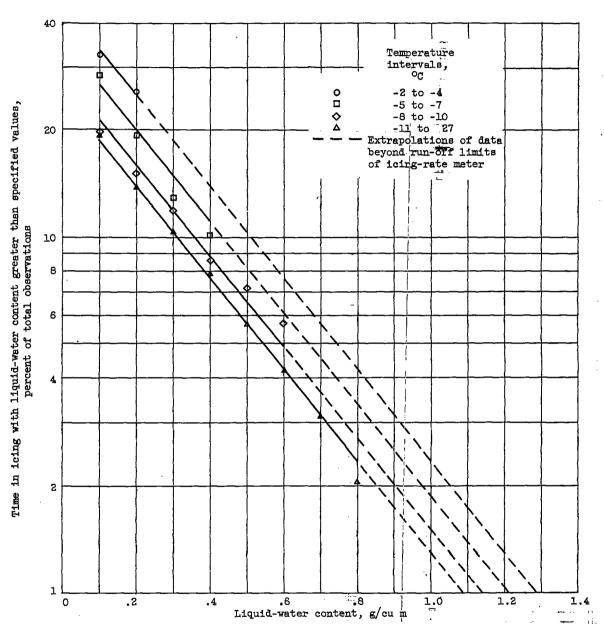


Figure 16. - Cumulative frequency of liquid-water content at various temperature intervals computed from icing-rate data.

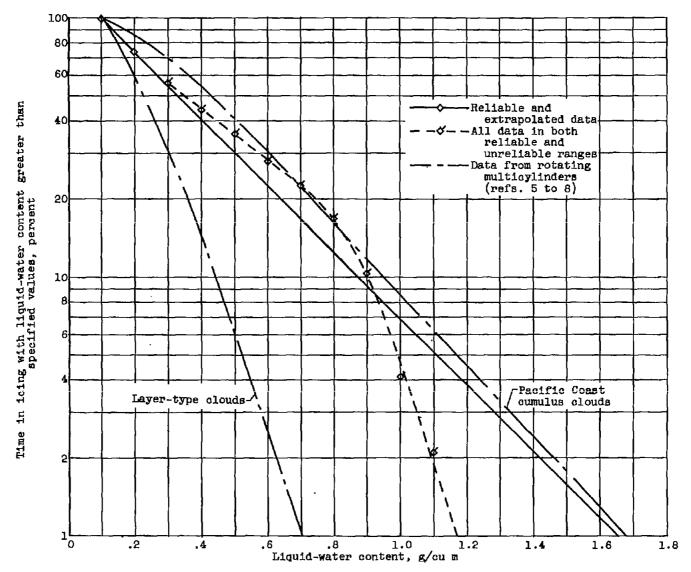


Figure 17. - Cumulative frequency of all liquid-water content data.

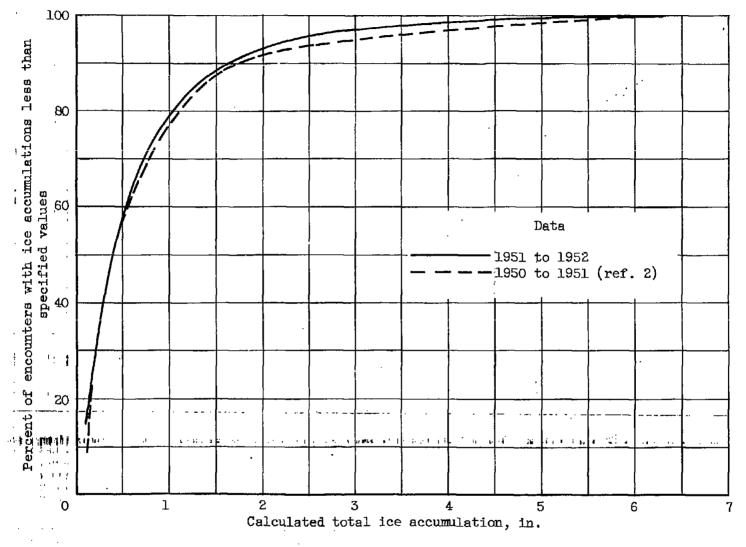


Figure 18. - Cumulative frequency of calculated total ice accumulation on sensing probe of icing-rate meter.

NACA - Langiey Field